# Technical Specifications Manual

Creditor, Debtor, Cash and Liquidity Management



### Customer Care

### Customer service for account documents

Advice and sales Telephone +41 58 448 14 24

### Legal notice

PostFinance Ltd 3030 Bern

Version April 2025

#### April 2025 modifications

(marked in the manual with a black line in the margin)

### Section Modification 3.10/3.11/3.12 ISO V2019: new subelement Code: for account category ISO V2019: new subelement Name: for account designation 3.11 ISO V2019: new subelement Amount Currency: Amount and currency of the gross interest and/or withholding tax for interest bookings ISO V2019: new subelement Credit Debit Indicator: Indicator of whether the gross interest and/or withholding tax is a credit or debit ISO V2019: new subelement Priority: Additionally for the account interest settlement: INTE: gross interest/WHLD: withholding tax 3.10/3.11/3.12 ISO V2019: Additional Information: Modification to 2

The TBS (Telebanking Server) channel has been deleted throughout the document.

### **November 2024 modifications**

ISO version 2009: camt (creditor order notification V2) will be discontinued in November 2024 – no extensions are possible.

ISO version 2019: the camt.052 incremental has been added to the service. This contains all entries since the last intraday statement.

Section	Modification
3.5	Creditor/StrtNm field: max. 70 characters
	Creditor/BldgNb field: max. 16 characters
	Creditor/PstCd field: max. 16 characters
	Creditor/TwnNm field: max. 35 characters
3.10/3.11/3.12	Additional Information field: modification of SPS version to 2.1
3.12	Charges/Prtry field: new wording for the categories

#### **December 2022 modifications**

"ISO V2019:" new subelement <Party>: always appears after <Debtor>, <Ultimade Debtor>, <Creditor> and <Ultimade Creditor>

# Table of contents

<b>1</b> 1.1 1.2 1.3 1.4 1.5	General information Target group Use of the manual Referencing documents Applicable provisions Definitions of terms	<b>5</b> 5 5 5 6
<b>2</b> 2.1 2.2 2.3 2.4 2.5 2.6 2.7	<b>Channel-specific file names</b> Structure of file names Overview of file names for EPO according to message types and channels Overview of file names for CH-DD according to message types and channels Overview of file names for OSR according to message types and channels Summary of file names according to message type and channel for IBAN, IBAN with Creditor Reference and QR bill virtual account Overview of file names for account statements, intraday account movements and credit/ debit notifications according to message types and channels Sample files	9 9 10 11 11 11 12
3.9 3.10 3.11 3.12 3.12.1 3.12.2	ISO 20022 XML format Supported ISO versions Character set EPO ISO 20022 in XML format Additional technical information on the Swiss Implementation Guidelines for EPO (pain.001) pain.001 Electronic payment order CH-DD ISO 20022 in XML format pain.008 CH-DD direct debit order pain.002 status report EPO CH-DD Direct Debit Structure of camt message types and size limitations camt.052 intraday account movements camt.053 account statement camt.054 detailed notification camt.054 from pain.001 camt.054 booking	<b>13</b> 13 13 14 15 29 30 34 34 34 37 38 39 42 56 56 63 73
<b>4</b> 4.1 4.2 4.3 4.4 4.5 4.6 4.7	SWIFT MT-Files Supported SWIFT standard Character set MT940 customer statement message MT942 Statement Message MT950 stement message (for banks) MT900 statement message (debits for banks) MT910 statement message (credits for banks)	<b>76</b> 76 76 76 77 78 78 78 79


# 1 General information

#### 1.1 Target group

The present Technical Specifications Manual is aimed at software partners and developers and for business customers with individual software. It includes technical mapping, channel-specific file names and information on ISO 20022 and SWIFT messages.

### 1.2 Use of the manual

The following diagram provides on overview of documents offered to cover the various payment transaction products of PostFinance, specifications of the Swiss Financial Centre, and serves as a guide to users of the present Manual.

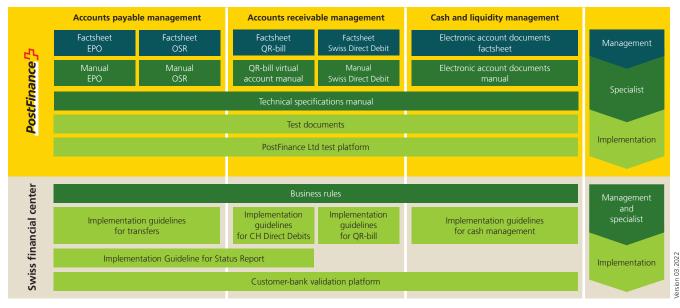

This overview shows a selection of key documents relating to payment transactions. Other documents can be found online at **postfinance.ch/manuals;** version March 2022

#### **1.3 Referencing documents**

- OSR Manual: outpayment slips with reference number
- CH-DD (Swiss Direct Debit) Manual
- Electronic Account Documents Manual
- EPO Manual: electronic payment orders via file transfer
- Technical channels Manual
- Legal and notification Manual
- QR bill virtual account Manual
- The bank transaction code: BTC
- Swiss Implementation Guidelines for Cash Management,
- Swiss Business Rules for Payments and Cash Management.

### **1.4 Applicable provisions**

The recommendations of the Swiss Financial Centre, the so-called Swiss Payment Standards (SPS), basically apply. These are included in the Swiss Business Rules and the Implementation Guidelines for Transfers and Cash Management within payment transactions in Switzerland. The ISO 20022 definitions relating to the Swiss Business Rules and Implementation Guidelines can be downloaded from iso-payments.ch. The present Manual contains expert commentaries only on those particular technical specifications, which are not covered by the above documents.

### 1.5 Definitions of terms

Term	Abbreviation	Definition/Explanation
Additional Optional Services	AOS	Additional optional services with standard ISO 20022 which can vary from financial institution to financial institution.
Bank Transaction Code	BTC	Element bank transaction code defines the type of transaction. This is an externally defined code list. In Switzerland, this code is also known as transaction code.
Business identifier code	BIC	A business identifier code (BIC) is an 8- or 11-digit code (ISO 9362) assigned by SWIFT through which every partner participating directly or indirectly (financial institution, company, broker, etc.) can be clearly identified.
Business-to-business	B2B	Communication and business relations between at least two companies.
Business-to-customer	B2C/COR1	Communication and business relations between companies and consumers (private and business customers).
camt message types	camt	camt is an abbreviation for cash management. These XML-based message types are used as a reporting tool between bank and customer according to the definitions of standard ISO 20022.
	camt.052	Outgoing deliveries of ISO 20022 camt.052 messages for intraday account movements are possible periodically (hourly, every two hours) or daily at a maximum of three fixed points in time. Version full: camt.052 messages always include all bookings since the last regular account statement. ISO V2019, "incremental" version: each camt.052 message contains all entries since the last intraday statement.
	camt.053	camt.053 messages are the ISO 20022 standard for account statements and are by default notified of together with the bank transaction codes (BTC) released by ISO. In notifications of camt.053 account statements, the definitions of ISO 20022 basically apply, which are laid down in the Swiss Business Rules and the Implementation Guidelines for Cash Manage- ment. camt.053 messages are available with or without detailed notification.
	camt.054	Detailed notifications of credits and debits in standard ISO 20022 are covered through camt.054 messages. At PostFinance, detailed notifications can be received in format camt.054 or format camt.053 (account statements with detailed notifications) on request. Duplicate outgoing deliveries of details are not possible.
	camt.054 CND camt.054 CWD/ SIA	ISO 20022 messages which include information on payment orders (pain.001) and transactions executed. These correspond to confirmations of execution / single confirmations at PostFinance.
CH-DD Core Direct Debit (Swiss COR1 Direct Debit)	CH-DD COR1	CH-DD Core Direct Debit with the right of objection is the payment procedure of PostFinance for processing direct debits of business customers at the expense of consumers in Swiss francs or euros in Switzerland, as laid down in the corresponding rulebook.
CH-DD Business Direct Debit (Swiss B2B Direct Debit)	CH-DD B2B	CH-DD Business Direct Debit without the right of objection is the payment procedure of PostFinance for processing direct debits of business customers as invoicing parties and business customers as direct debit payers in Switzerland.
Customer Credit Transfer Initiation	pain.001	Customer credit transfer initiation XML messages (pain.001) are used by customers for the electronic commissioning of the transferring financial institution for transfer orders. PostFinance uses these ISO 20022 messages for electronic payment orders (EPO).
Customer Payment Status Report (Processing message)	pain.002	Customer payment status report XML messages pain.002) are used to inform customers about the status of collection orders pain.008 and transfer orders pain.001 transmitted by the respective financial institution.

Term	Abbreviation	Definition/Explanation
Customer Direct Debit Initiation	pain.008	Customer direct debit initiation XML messages (pain.008) are used by customers for the electronic commissioning of the respective financial institution for direct debit orders. In CH-DD direct debit schemes, pain.008 is to be applied to Swiss direct debits.
Electronic payment order	EPO	Electronic payment orders in XML format according to standard ISO 20022.
European Payments Council	EPC	The European Payments Council (EPC) is the coordination and decision-making body of the European banking industry for payment transactions. It works out, inter alia, the procedures for SEPA transfers and SEPA direct debits, which help to implement an integrated euro payments market.
Extensible Markup Language	XML	Extensible markup language (XML) is a data format.
Gross principle		EPO: On the basis of the gross principle, the sum of all transactions accepted for execution is booked. Non-executable transactions are carried back to the ordering customer with the same value date.
International Organisation for Standardisation	ISO	The International Organisation for Standardisation – ISO for short – is an international association of standards organisations. It works out international standards in various fields.
Message Type	MT	SWIFT messages, standardized data formats for message exchange. Example: MT940
Multiple attempts at debiting	MAD	CH-DD direct debit scheme: With this additional service, transactions (that cannot be executed on the due date) automatically undergo further debit attempts on the next, second, third, fourth and/or fifth working day, according to the selection.
		EPO: For orders with insufficient cover, further attempts at debiting are made over the next five postal working days on a daily basis. As soon as cover is available, orders are executed. If no cover is available up to five postal working days after the requested due date, orders are rejected.
Net principle		Standard setting for EPO. On the basis of the net principle, non-executable transactions are generally not booked. Only transactions executed are identified as credits.
Outpayment slip	OSR	OSR is an electronic creditor service which allows customers to perform any type of outpayment in cash. Debits are booked electronically.
pain message types	pain	pain (payments initiation) indicates XML messages in transactions between customers and the bank according to the definitions of standard ISO 20022.
Postal working day		Weekdays Monday to Friday are considered postal working days, with the exception of public holidays in the Canton of Berne.
QR bill	QRR	QR-IBAN When paying with a structured QR reference, the QR-IBAN must be used as a confirmation of the credit account. The payment procedure with reference is identified by a special identification of the financial institution (QR-IID) within the QR-IBAN, the QR-IID (digit 5 to 9 of the QR-IBAN).
		QR-IID The QR-IID is a variant of institutional identification (IID). QR-IIDs consist solely of numbers from 30000 to 31999. Based on these QR-IIDs, predetermined IBANs (QR-IBANs) will only be used for the new procedure with QR reference in the QR bill.
		QR bills Invoice with a QR code.

Term	Abbreviation	Definition/Explanation
R-transactions		Transactions resulting in exception processing during the payment procedure are called R-transactions. R-transactions describe a payment process which cannot be properly executed by a payment service provider or result in exception processing, due to, inter alia, insufficient funds, a cancellation, an incorrect amount or incorrect date, a missing mandate or an incorrect or closed payment account. R-transactions for QR bill virtual account (va) and OSR: transactions were booked and credited to the respective QR bill virtual account (va) customer's account or debited to the respective OSR customer's account. If, due to erroneous payments or other irregularities, the transactions are cancelled, they are called R-transactions and identified in the respective file.
Rejects		A payer's institution can cause a reject of a collection in a direct debit process or of a payment in a transfer process prior to offsetting, due to technical reasons or because it is not able for other reasons to accept the respective collection or transfer (R-transaction).
Single Euro Payments Area	SEPA	The Single Euro Payments Area (SEPA) is the area of the EU/EEA countries and Switzerland where citizens, companies and other economic operators can effect or collect payments in euros, irrespective of whether these are processed within national boudaries or beyond, under the same conditions and with the same rights and obligations – irrespective of the actual location.
Society for Worldwide Interbank Financial Telecommunication	SWIFT	Cooperative society of international banks which operates a worldwide telecommunications network and defines standards for electronic cooperation.
Standard ISO-20022		The objective of this standard of the International Organisation for Standardisation (ISO) is to bring about a global convergence of existing and new message standards from various sectors of the financial industry. In addition to messages regarding payment transactions and account reporting, ISO 20022 also covers other areas, such as securities trading, foreign trade, or treasury. The new ISO version 2019 has been in operation in the Swiss financial center since November 2022. The parallel phase, in which the 2009 (pain) / 2013 (camt) and 2019 versions will be available as standard, will run until November 2026. From this point onwards, the processing systems must be able to support the new ISO version.
Structured customer reference for the creditor	SCOR	Structured Creditor Reference (according to ISO 11649) must not be used with a QR-IBAN.
Virtual account	VA	Virtual accounts are provided by PostFinance to make receivables easy to manage. This means, for example, that the notification for each virtual account can be individually managed and processed in decentralized receivables departments. Several virtual accounts with the same or different settings can be used on a main account. The credits are always made to the main account to which the virtual account is linked as per the settings selected. No account statements or interest statements are created for virtual accounts.
XML schema definition	XSD	An XML schema describes the elements and the structure of XML files.

### 2 Channel-specific file names

The following chapter describes the file names of individual message types with regard to their channels of delivery.

#### 2.1 Structure of file names

To facilitate identification of the delivered pain, camt, MT and pdf messages, the structure of the file names has been defined as follows:

- Message type (e.g., camt.053)
- File type (Productive/Test/Reconstruction/Cancellation)
- Contract reference<sup>1</sup> (e.g., IBAN)
- Delivery number (DI no.: e.g., 123456789)
- Customer-specific file reference (cust. ref., maximum 15 characters, e.g., Division, permitted are digits 0–9, upper and lower case letters and the minus sign, if no reference is defined, 0 appears)
- Time stamp (e.g., 2016091211011199)
- File name suffix (e.g., .xml)

<sup>1</sup> A contract reference can include 0 if the document relates to several contracts/accounts or if the contract reference cannot be identified by the system.

### 2.2 Overview of file names for EPO according to message types and channels

Message type	Channel	File name
Technical confirma- tion of receipt pain.002 EPO	File delivery service / Managed File Transfer PostFinance / SWIFT FileAct	pain.002-EPO_P_0_0_0_2014091011011199.xml
Processing message pain.002 EPO	EBICS <sup>2</sup> / E-finance / File delivery service / Managed File Transfer PostFinance / SWIFT FileAct	pain.002-EPO_P_CH030900000250090342_99999999999_0_2014091011011199.xml
Processing message PDF EPO Confirmation of execution/single confirmation PDF EPO	EBICS <sup>2</sup> / E-finance / File delivery service / Managed File Transfer PostFinance / SWIFT FileAct	CRE_P_CH030900000250090342_99999999999_0_2014091011011199.pdf
Confirmation of execution camt.054	EBICS <sup>2</sup> / E-finance / File delivery service / Managed File Transfer PostFinance / SWIFT FileAct	camt.054-EPO_P_CH030900000250090342_99999999999_0_2014111311011199.xml

<sup>2</sup> Note: The file name structure of channel EBICS can be modified by the software solution.

To see the exact file name in EBICS download, customers must contact their software partner.

Message type	Channel	File name
Single confirmation camt.054	EBICS <sup>1</sup> / E-finance / File delivery service / Managed File Transfer PostFinance / SWIFT FileAct	camt.054-EPO_P_CH030900000250090342_99999999999_0_2014111311011199.xml
Detailed notification camt.054-returns <sup>2</sup>	EBICS <sup>1</sup> / E-finance / File delivery service / Managed File Transfer PostFinance / SWIFT FileAct	camt.054-RETURNS_P_CH030900000250090342_9999999999_0_2014111311011199. xml
PDF confirmation of payment	EBICS <sup>1</sup> / E-finance / File delivery service / Managed File Transfer PostFinance / SWIFT FileAct	CRE_P_CH030900000250090342_9999999999_0_2014091011011199.pdf

### 2.3 Overview of file names for CH-DD according to message types and channels

Message type	Channel	File name
Detailed notification camt.054	EBICS <sup>1</sup> / E-finance / File delivery service / Managed File Transfer PostFinance / SWIFT FileAct	camt.054-CHDD_P_CH030900000250090342_9999999999_0_2014111311011199.xml
Technical confirmation of receipt pain.002 CH-DD	EBICS <sup>1</sup> / File delivery service / Managed File Transfer PostFinance / SWIFT FileAct	pain.002-CHDD_P_0_0_0_2014091011011199.xml
Processing message pain.002 CH-DD	EBICS <sup>1</sup> / E-finance / File delivery service / Managed File Transfer PostFinance / SWIFT FileAct	pain.002-CHDD-B2B_P_CH030900000250090342_9999999999_0_2014091011011199.xml

Possible message types: pain.002-CHDD-COR1 or pain.002-CHDD-B2B

<sup>1</sup>Note: The file name structure of channel EBICS can be modified by the software solution.

To see the exact file name in EBICS download, customers must contact their software partner. <sup>2</sup> Note: without "RETURNS" mentioned in the file name if the details from IBAN, QR bill virtual account and Return are delivered in the same file.

### 2.4 Overview of file names for OSR according to message types and channels

Message type	Channel	File name
Detailed notification camt.054	EBICS <sup>1</sup> / E-finance / File delivery service / Managed File Transfer PostFinance / Connect Direct / SWIFT FileAct	camt.054-ESR-ASR_P_CH030900000250090342_9999999999_0_2014111311011199.xml

## 2.5 Summary of file names according to message type and channel for IBAN, IBAN with Creditor Reference and QR bill virtual account

Message type	Channel	File name
camt.054 Detailed notification	EBICS <sup>1</sup> / E-finance / File Delivery Service / Managed File Transfer PostFinance / Connect Direct / SWIFT FileAct	camt.054_P_CH030900000250090342_999999999_0_2014111311011199.xml

### 2.6 Overview of file names for account statements, intraday account movements and credit/ debit notifications according to message types and channels

Message type	Channel	File name
Account statement PDF	EBICS <sup>1</sup> / E-finance / File delivery service / Managed File Transfer PostFinance / Connect Direct	REP_P_CH030900000250090342_9999999999_0_2014091011011199.pdf
Account statement camt.053	EBICS <sup>1</sup> / E-finance / File delivery service / Managed File Transfer PostFinance / Connect Direct / SWIFT FileAct	camt.053_P_CH030900000250090342_999999999_0_2014091011011199.xml
Account statement MT940	E-finance / File delivery service / Managed File Transfer PostFinance / Connect Direct / SWIFT FileAct	MT940_P_CH030900000250090342_999999999_0_2014091011011199.dat
	EBICS <sup>1</sup>	MT940(1).dat
Account statement MT950	EBICS <sup>1</sup> / SWIFT FIN FileAct	MT950_P_CH030900000250090342_999999999_0_2014091011011199.dat

<sup>1</sup>Note: The file name structure for channel EBICS can be modified by the software solution.

To see the exact file name in EBICS download, customers must contact their software partner.

Message type	Channel	File name
Intraday account movements camt.052	EBICS <sup>1</sup> / File delivery service / Managed File Transfer PostFinance / Connect Direct / SWIFT FileAct	camt.052_P_CH030900000250090342_9999999999_0_2014091011011199.xml
Intraday account movements MT942	File delivery service / Managed File Transfer PostFinance / Connect Direct / SWIFT FileAct	MT942_P_CH030900000250090342_999999999_0_2014091011011199.dat
	EBICS <sup>1</sup>	MT942.Intraday(1).dat
Credit or debit notification camt.054	EBICS <sup>1</sup> / File delivery service / Managed File Transfer PostFinance / Connect Direct / SWIFT FileAct	camt.054-Credit_P_CH030900000250090342_999999999_0_2014111311011199.xml (debit for direct debits)
Interest settlement PDF	EBICS <sup>1</sup> / E-finance / File delivery service / Managed File Transfer PostFinance / Connect Direct / SWIFT FileAct	TAX_P_CH030900000250090342_99999999999_0_2014091011011199.pdf
Interest settlement Pooling PDF	E-finance	POOL_P_CH030900000250090342_9999999999_0_2014091011011199.pdf
Interest distribution order PDF	E-finance	POOL_P_CH030900000250090342_9999999999_0_2014091011011199.pdf
Balance report PDF	E-finance	POOL_P_CH030900000250090342_99999999999_0_2014091011011199.pdf

<sup>1</sup>Note: The file name structure for channel EBICS can be modified by the software solution. To see the exact file name in EBICS download, customers must contact their software partner.

### 2.7 Sample files

Samples files of SWIFT MT messages and pain/camt messages can downloaded from **postfinance.ch/samplefiles**.

# 3 ISO 20022 XML format

#### 3.1 Supported ISO versions

PostFinance supports the current version of SIX Interbank Clearing as amended of the released Swiss Business Rules and Implementation Guidelines. These SIX Swiss Payment Standards are based on the ISO and EPC documents and provide information about the supported ISO versions. The Swiss Business Rules and Implementation Guidelines are available for downloading on **iso-payments.ch**.

### 3.2 Character set

The character set according to the Swiss Implementation Guidelines is applied.

### 3.3 EPO ISO 20022 in XML format

At PostFinance, the following transactions can be processed in EPO ISO 20022 XML format via pain.001 messages:

### Payment methods according to the 2019 ISO Implementation Guidelines

Payment method	D	S	Х	c
Title	Domestic	SEPA	International and foreign currency domestic	Bank check/postcash domestic and international
Comment			V1: foreign currency (FC) domestic V2: international	
Payment method	TRF	TRF	TRF	СНК
Service level	Must not be SEPA	SEPA	Must not be SEPA	Must not be SEPA
Creditor account	IBAN (QR-IBAN) or account	IBAN	IBAN or account	May not be delivered
Creditor agent	Financial institution <sup>1</sup> domestic (CH/LI)	BIC (optional)	V1: Financial institution 1 domestic (CH/LI) V2: Financial institution international	May not be delivered
Currency	CHF/EUR	EUR	V1: all except CHF/EUR V2: all	all

<sup>1</sup> Optional when using an IBAN or a QR-IBAN, as the creditor agent is then determined from the IBAN/QR-IBAN.

Domestic transfers	
Type of payment <sup>1</sup>	Description
D	Domestic

### Foreign bank transfers<sup>2</sup>

Type of payment <sup>1</sup>	Description
S	SEPA payments
Х	Version 1: foreign currency domestic
	Version 2: international payments

# Payments without financial institution (domestic and international 2)Type of payment 1DescriptionCBank check / Cash international 3 (CI)

<sup>1</sup> Types of payment according to the Swiss Implementation Guidelines for customer-to-bank messages for transfers as payment transactions.

<sup>2</sup> Detailed information for each country and a table listing transaction types, payment currencies and additional services for each country is available electronically and can be downloaded at **postfinance.ch/manuals**.

<sup>3</sup> Please note that PostFinance does not support domestic/international bank cheques for payment type 8.

### **3.4 Additional technical information on the Swiss Implementation Guidelines for EPO (pain.001)**

In addition to the Implementation Guidelines **(iso-payments.ch)**, the following table provides information on how some of the ISO fields are processed or handled at PostFinance.

Further details for certain key fields are provided to ensure the smooth processing of pain and camt messages.

### 3.5 pain.001 Electronic payment order

Level	ISO field	Notes by PostFinance	<i>ISO2009</i> ISO2019	<i>ZA 3: domestic</i> ZA D: domestic	<i>ZA 4: domestic FC</i> ZA X: version 1	<i>ZA 5: SEPA</i> ZA S: SEPA	ZA 6: international ZA X: version 2	ZA 8: Cash international ZA C: Cash international
А	<b>Message Identification</b> <msgld></msgld>	PostFinance checks on the clarity of the respective message within 90 days. Identification should therefore always be clear.						
А	Creation Date Time <credttm></credttm>	Recommendation: Should correspond to the actual date/time of issue						
A	Number of Transaction <nboftxs></nboftxs>	Number of transactions of all C levels (credit transfer information) throughout the entire message						
А	Control Sum <ctrlsum></ctrlsum>	Sum of amounts throughout all C levels, irrespective of currency						
А	Initiating Party <initgpty></initgpty>	At least one of elements name or identifica- tion must be provided.						
A	Initiating Party <initgpty> +CtctDtls ++Nm</initgpty>	Must be used if "Contact Details" is used: Name of software used to create this message, followed by a "/" and the name of the software developer, 70 characters max.	ISO2009: still valid ISO2019: N/A					
A	Initiating Party <initgpty> +CtctDtls ++Othr</initgpty>	Should contain the specific version of the software used to create this message.	ISO2009: still valid ISO2019: N/A					
A	LEI <initgpty> +Id ++OrgId +++LEI</initgpty>	New ISO2019 element. Irrelevant. Will be ignored.	New ISO2019 element. Irrelevant. Will be ignored.					
А	Forwarding Agent <fwdgagt></fwdgagt>	Not applicable. Is ignored.						

Level	ISO field	Notes by PostFinance	<i>ISO2009</i> ISO2019	<i>ZA 3: domestic</i> ZA D: domestic	ZA 4: domestic FC ZA X: version 1	<i>ZA 5: SEPA</i> ZA S: SEPA	ZA 6: international ZA X: version 2	ZA 8: Cash international ZA C: Cash international
В	Payment Information Identification <pmtinfld></pmtinfld>	The value must be clear throughout the entire message. In addition to checking for duplicates at A level, additional checks at B level are made. The value is used as a criterion for duplicate checking together with the debtor account, charges account, requested execution date and instructed amount (currency) or equivalent amount (currency of transfer). Orders (level B) bearing identical identification ( <pmtlnfld>) will be rejected.</pmtlnfld>						
В	Payment Method <pmtmtd></pmtmtd>	PO 8 cannot be delivered together with the other payment types within one and the same B level.	<i>ISO200</i> 9 ISO2019	<i>TRA   TRF</i> TRF	<i>TRA   TRF</i> TRF	<i>TRA / TRF</i> TRF	<i>TRA / TRF</i> TRF	<i>СНК</i> СНК
В	Batch Booking <btchbookg></btchbookg>	<ul> <li>True or False, ir void = true (bulk direct debit).</li> <li>False is not permitted for orders &gt; 100 transactions and commission orders.</li> </ul>						
		Otherwise, the value is mutated to <b>true</b> automatically.						
В	Number of Transaction <nboftxs></nboftxs>	Checking is done against the corresponding value at A level (optional).						
В	Control Sum <ctrlsum></ctrlsum>	Checking is done against the corresponding value at A level (optional).						
В	Payment Type Information <pmttpinf></pmttpinf>	Can be used at B level or C level but the same sub-element cannot be used at both levels.						
В	Payment Type Information <pmttpinf> ++Instruction Priority</pmttpinf>	HIGH corresponds to express execution. For normal execution, the element can be omitted. HIGH is to be determined at level B, the values at C level are ignored.						

Level	ISO field	Notes by PostFinance	<i>ISO2009</i> ISO2019	<i>ZA 3: domestic</i> ZA D: domestic	ZA 4: domestic FC ZA X: version 1	<i>ZA 5: SEPA</i> ZA S: SEPA	ZA 6: international ZA X: version 2	ZA 8: Cash international ZA C: Cash international
В	Payment Type Information <pmttpinf> ++SvcLvl +++Cd</pmttpinf>	Only SEPA and SDVA are permitted. Codes URPG and PRPT are ignored.	<i>ISO200</i> 9 ISO2019			<i>SEPA</i> SEPA	<i>SDVA</i> SDVA	
В	Payment Type Information <pmttpinf> ++SvcILvI +++Prtry</pmttpinf>	Not applicable. Is ignored.						
В	Payment Type Information <pmttpinf> ++LcIInstrm +++Prtry</pmttpinf>	Recommendation: use at C level. If it is used at B level, the entire order must be delivered with pure payment types.						
В	Payment Type Information <pmttpinf> ++Ctgy Purp +++Cd</pmttpinf>	SALA for wage payments or PENS for pension payments. PENS may only be used after consultation with PostFinance, otherwise, the code are ignored. Codes other than SALA and PENS are ignored.						
В	<b>Debtor</b> <dbtr></dbtr>	The debtor is identifed only on the basis of the debtor account. Data in field Debtor is ignored.						
В	<b>Debtor Account</b> <dbtracct> ++Id +++IBAN</dbtracct>	Postal account in IBAN format. Recommendation: use IBAN instead of proprietary account number.						

Level	ISO field	Notes by PostFinance	<i>ISO2009</i> ISO2019	ZA 3: domestic ZA D: domestic	ZA 4: domestic FC ZA X: version 1	<i>ZA 5: SEPA</i> ZA S: SEPA	ZA 6: international ZA X: version 2	ZA 8: Cash international ZA C: Cash international
В	<b>Debtor Account</b> <dbtracct> ++Id +++Othr ++++Id</dbtracct>	The debtor account number can be delivered in two different formats: VVXXXXXP VV = prefix XXXXX = serial no.; right-justified, to the left with zeros P = check digit as per Modulo 10 recursive or VV-XXXXX-P VV = prefix XXXXX = serial no.; right-justified, to the left without zeros P = check digit as per Modulo 10 recursive						
В	<b>Debtor Account</b> <dbtracct> ++Tp +++Cd</dbtracct>	Not applicable. Is ignored.						
В	<b>Debtor Account</b> <dbtracct> ++Tp +++Prtry</dbtracct>	Manages notifications of the creditor's order and can include the following values: NOA, SIA, CND or CWD. If not included, the account master data applies. For SALA, SIA/CWD are suppressed by default or delivered without amount, depending on the outgoing delivery format. If the customer wishes SIA/CWD notifica- tions for his commission orders, this must be set in the master data beforehand.						
В	<b>Debtor Account</b> <dbtracct> ++Ccy</dbtracct>	ls ignored.						
В	<b>Debtor Agent</b> <dbtragt> ++FinInstnId</dbtragt>	BIC of PostFinance = POFICHBEXXX or POFICHBE. Clearing no. of PostFinance = 9000. Together with the clearing no., code CHBCC must be entered in field Clearing System Identification/Code.						

Level	ISO field	Notes by PostFinance	<i>ISO2009</i> ISO2019	ZA 3: domestic ZA D: domestic	ZA 4: domestic FC ZA X: version 1	<i>ZA 5: SEPA</i> ZA S: SEPA	ZA 6: international ZA X: version 2	ZA 8: Cash international ZA C: Cash international
В	Ultimate Debtor <ultmtdbtr></ultmtdbtr>	In this element, data of the original ordering party can be provided. Original ordering parties are considered third parties effecting payments via an EPO customer. This element can be provided at B or C level.						
В	<b>Ultimate Debtor</b> <ultmtdbtr> ++PstlAdr</ultmtdbtr>	Can be delivered structured or unstructured, see section "Use of address information" from Implementation Guidelines for Transfer						
В	<b>ChargeBearer</b> <chrgbr></chrgbr>	Please consult List of International Payment Transactions (IPT) beforehand (postfinance.ch/handbuecher). For OUR, DEBT is used, all other codes are forwarded abroad as SHA.	<i>ISO2009/</i> ISO2019	n/a	n/a	SLEV or do not use	0	0
В	ChargesAccount <chrgsacct></chrgsacct>	If no charges account is provided, any charges are debited to the debtor account.						
В	ChargesAccount <chrgsacct> ++Id +++IBAN</chrgsacct>	Charges account in IBAN format. Recommendation: use IBAN instead of proprietary account number.						
В	ChargesAccount <chrgsacct> ++Id +++Othr ++++Id</chrgsacct>	The charges account, similar to the debtor account, can be provided in two different formats. See Debtor Account						
С	Payment Identification <pmtid> ++EndToendId</pmtid>	Must be assigned very clearly for each transaction.	<i>ISO200</i> 9 ISO2019	M M	M M	M M	M M	M M
C	Payment Type Information <pmttpinf></pmttpinf>	Can be used at B or C level, but the same sub-element cannot be used at both levels.						

Level	ISO field	Notes by PostFinance	<i>ISO2009</i> ISO2019	ZA 3: domestic ZA D: domestic	ZA 4: domestic FC ZA X: version 1	ZA 5: SEPA ZA S: SEPA	ZA 6: international ZA X: version 2	ZA 8: Cash international ZA C: Cash international
С	Payment Type Information <pmttpinf> ++Instruction Priority</pmttpinf>	Not to be used at C level.						
C	Payment Type Information <pmttpinf> ++SvcLvl +++Cd</pmttpinf>	Only SEPA and SDVA are permitted. Codes URGP and PRPT are ignored.	<i>ISO200</i> 9 ISO2019	N/A N/A	N/A N/A	<i>SEPA</i> SEPA	<i>SDVA</i> SDVA Consult IPT List beforehand	N/A N/A
С	Payment Type Information <pmttpinf> ++SvcILvI +++Prtry</pmttpinf>	Not applicable. Is ignored.						
С	Payment Type Information <pmttpinf> ++LcIInstrm +++Prtry</pmttpinf>	May no longer be delivered with the discontinuation of ISR/IS.						
С	Payment Type Information <pmttpinf> ++Ctgy Purp +++Cd</pmttpinf>	ls ignored at C level.						
С	Amount <amt> ++InstdAmt</amt>		<i>ISO2009/</i> ISO2019	CHF/EUR	Not CHF/EUR. Currencies permitted as per IPT List.	EUR	Currences permitted as per IPT List.	Currencies permitted as per IPT List.
С	Amount <amt> ++EqvtAmt</amt>	Application permitted. Attribute Ccy (currency) must correspond to the account currency of the debtor account. Currency code in CcyOfTrf according to currency overview.	<i>ISO2009/</i> ISO2019	Not account currency	Not account currency	Not account currency	Not account currency	Not account currency
С	<b>Exchange Rate</b> Information <xchgrateinf></xchgrateinf>	Not applicable. Is ignored.						

Level	ISO field	Notes by PostFinance	<i>ISO2009</i> ISO2019	<i>ZA 3: domestic</i> ZA D: domestic	ZA 4: domestic FC ZA X: version 1	<i>ZA 5: SEPA</i> ZA S: SEPA	ZA 6: international ZA X: version 2	ZA 8: Cash international ZA C: Cash international
С	<b>ChargeBearer</b> <chrgbr></chrgbr>	Please consult IPT beforehand (postfinance.ch/manuals). For OUR, DEBT is used, all other codes are forwarded abroad as SHA.	<i>ISO2009/</i> ISO2019	N/A	N/A	SLEV or do not use	0	0
С	Ultimate Debtor <ultmtdbtr></ultmtdbtr>	Original ordering parties are considered third parties effecting payments via an EPO customer.						
С	<b>Ultimate Debtor</b> <ultmtdbtr> ++Nm</ultmtdbtr>	Recommendation: if UltmtDbtr is used, always provide the name.						
С	<b>Ultimate Debtor</b> <ultmtdbtr> ++PstlAdr</ultmtdbtr>	Structured or unstructured, see section "Use of address information" from Implementa- tion Guidelines for Transfer				Not forwarded in interbank trans- actions.		
С	Intermediary Agent 1 <intrmyagt1></intrmyagt1>	Not applicable. Is ignored.	<i>ISO2009/</i> ISO2019	N/A	N/A	N/A	N/A	N/A
C	Creditor Agent <cdtragt></cdtragt>	If both IBAN and BIC are supplied, the creditor agent is determined from IBAN when executing payment.	<i>ISO2009/</i> ISO2019	IBAN only: CdtrAgt can be omitted when delivering IBAN in Creditor Account				
С	<b>Creditor</b> <cdtr></cdtr>	Must always be delivered with the discontinuation of ISR.	<i>ISO2009/</i> ISO2019	Μ	Μ	Μ	Μ	М
C	<b>Creditor</b> <cdtr> ++Id</cdtr>	Not applicable. Is ignored.						
С	<b>Creditor</b> <cdtr> ++Nm</cdtr>	Element can contain max. 70 characters. When forwarding to the recipient, PostFinance automatically inserts a line break after the first 35 characters.						
С	<b>Creditor</b> <cdtr> ++PstlAdr +++StrtNm</cdtr>	The element can contain max. 70 characters. Any characters from position 71 are ignored.						

Level	ISO field	Notes by PostFinance	<i>ISO2009</i> ISO2019	<i>ZA 3: domestic</i> ZA D: domestic	ZA 4: domestic FC ZA X: version 1	<i>ZA 5: SEPA</i> ZA S: SEPA	ZA 6: international ZA X: version 2	ZA 8: Cash international ZA C: Cash international
С	<b>Creditor</b> <cdtr> ++PstlAdr +++BldgNb</cdtr>	The element can contain max. 16 characters.						
С	<b>Creditor</b> <cdtr> ++PstlAdr +++PstCd</cdtr>	The element can contain max. 16 characters.						
С	<b>Creditor</b> <cdtr> ++PstlAdr +++TwnNm</cdtr>	The element can contain max. 35 characters. Any characters from position 36 are ignored.						
С	<b>Creditor</b> <cdtr> ++PstlAdr +++AdrLine</cdtr>	This element may only be used twice maximum and must not contain more than 70 characters per element. When forwarding to the recipient, PostFinance automatically inserts a line break after the first 35 characters, provided element address line is used only once. If the element is used twice, the first 35 characters will be taken over for each Address Line. Any characters from position 36 are ignored.						
С	Creditor <cdtr> ++Postal Address +++Country</cdtr>		<i>ISO2009/</i> ISO2019			Recommended	Recommended	Required
С	Creditor Account <cdtracct> ++Id +++IBAN</cdtracct>	Recipient account in IBAN format. It is recommended to use IBAN.	<i>ISO2009/</i> ISO2019	IBAN or QR-IBAN		Must not contain CH or LI in the first two positions.	Must not contain CH or LI in the first two positions.	N/A

Level	ISO field	Notes by PostFinance	<i>ISO2009</i> ISO2019	ZA 3: domestic ZA D: domestic	ZA <i>4: domestic FC</i> ZA X: version 1	<i>ZA 5: SEPA</i> ZA S: SEPA	ZA 6: international ZA X: version 2	ZA 8: Cash international ZA C: Cash international
С	<b>Creditor Account</b> <cdtracct> ++Id +++Othr ++++Id</cdtracct>	The credit account number can be supplied in two different formats: VVXXXXXP VV = prefix XXXXX = serial no.; right-justified, to the left with zeros P = check digit as per Modulo 10 recursive or VV-XXXXX-P VV = prefix XXXXX = serial no.; right-justified, to the left without zeros P = check digit as per Modulo 10 recursive	<i>ISO2009</i> /ISO2019	A proprietary domest may not be combine Agent). In this case, 1 must be provided.	d with BIC (Creditor			
С	Ultimate Creditor <ultmtcdtr></ultmtcdtr>	If at hand, this information is forwarded.						
С	Instruction for Creditor Agent <instrforcdtragt></instrforcdtragt>	Not applicable. Is ignored.						
С	Instruction for Debtor Agent <instrfordbtragt></instrfordbtragt>	Possible codes: – PRIO for priority payments – NORETRY for one-off deactivation of multiple attempts at debiting						
		PRIO and NORETRY may be used at B and/or C level. B level is given priority. At C level, the instruction must be consistent for all payments, otherwise the value will be ignored.						
		In this field, several values can appear at the same time, with the following presentation: 1. First the codes 2. Codes with delimiter comma, separating 3. Text with semicolon; beginning 4. Free text is ignored						
		Example: <instrfordbtragt>NORETRY,PRIO;free text<instrfordbtragt></instrfordbtragt></instrfordbtragt>						

Level	ISO field	Notes by PostFinance	<i>ISO2009</i> ISO2019	ZA 3: domestic ZA D: domestic	ZA 4: domestic FC ZA X: version 1	<i>ZA 5: SEPA</i> ZA S: SEPA	ZA 6: international ZA X: version 2	ZA 8: Cash international ZA C: Cash international
С	<b>Purpose</b> <purp> ++Cd</purp>	One code is allowed for information purposes and for forwarding to payment recipients (only with ISO messages)	<i>ISO2009/</i> ISO2019					Not allowed
C	<b>Regulatory Reporting</b> <rgltryrptg></rgltryrptg>	Required for payments in certain countries.	<i>ISO2009/</i> ISO2019				Required for payments in certain countries	Not applicable. Is ignored.
С	<b>Regulatory Reporting</b> <rgltryrptg> ++Debit Credit Reporting Indicator</rgltryrptg>	Defines whether the information concerns the customer (CRED), the beneficiary (DEBT) or both (BOTH).						
С	<b>Regulatory Reporting</b> <rgltryrptg> ++Details +++Country</rgltryrptg>	Country of the relevant regulatory authority						
С	<b>Regulatory Reporting</b> <rgltryrptg> ++Details +++Code</rgltryrptg>	Reporting code according to the definition of the relevant regulatory authority (central bank). If "Ctry" is used, the element "Cd" must be used.						
C	Regulatory Reporting <rgltryrptg> ++Details +++Type</rgltryrptg>		<i>ISO2009</i> ISO2019					<i>N/A</i> Will be ignored by PostFinance.
С	<b>Regulatory Reporting</b> <rgltryrptg> ++Details +++Date</rgltryrptg>		<i>ISO2009</i> ISO2019					<i>N/A</i> Will be ignored by PostFinance.
С	<b>Regulatory Reporting</b> <rgltryrptg> ++Details +++Amount</rgltryrptg>		<i>ISO2009</i> ISO2019					<i>N/A</i> Will be ignored by PostFinance.
С	<b>Regulatory Reporting</b> <rgltryrptg> ++Details +++Information</rgltryrptg>							

Level	ISO field	Notes by PostFinance	<i>ISO2009</i> ISO2019	<i>ZA 3: domestic</i> ZA D: domestic	ZA 4: domestic FC ZA X: version 1	ZA 5: SEPA ZA S: SEPA	ZA 6: international ZA X: version 2	ZA 8: Cash international ZA C: Cash international
С	Remittance Information <rmtlnf> ++Strd +++CdtrRefInf ++++Tp +++++CdOrPrtry +++++Cd</rmtlnf>		<i>ISO2009/</i> ISO2019	Must not be used with a QR-IBAN in the element "Creditor Account/ IBAN".	N/A	Must be used if "Creditor Reference Information" is used. Only permitted for the code "SCOR".	N/A	N/A
С	Remittance Information <rmtlnf> ++Strd +++CdtrRefInf ++++Tp +++++CdOrPrtry +++++Prty</rmtlnf>		<i>ISO2009/</i> ISO2019	To show the structured QR reference from the QR bill, this element must contain QRR, and may only be used in conjunction with a QR-IBAN in the element "Credit Account/IBAN".		N/A	N/A	N/A
С	Remittance Information <rmtlnf> ++Strd +++CdtrRefInf ++++Tp ++++Hssr</rmtlnf>	Not applicable. Is ignored.						
С	Remittance Information <rmtlnf> ++Strd +++CdtrRefInf ++++Ref</rmtlnf>		<i>ISO2009/</i> ISO2019	Must be used if "Creditor Reference Information" is used. Must contain "Creditor Refer- ence" according to ISO 11649 or QR reference.		Must be used if "Creditor Reference Information" is used. May contain "Creditor Refer- ence" according to ISO 11649.		
С	Remittance Information <rmtlnf> ++Strd +++Invcr</rmtlnf>	Not applicable. Is ignored.						

Level	ISO field	Notes by PostFinance	<i>ISO2009</i> ISO2019	<i>ZA 3: domestic</i> ZA D: domestic	ZA 4: domestic FC ZA X: version 1	ZA 5: SEPA ZA S: SEPA	ZA 6: international ZA X: version 2	ZA 8: Cash international ZA C: Cash international
С	Remittance Information <rmtlnf> ++Strd +++Invcee</rmtlnf>	Not applicable. Is ignored.						
С	Related Remittance Information <rltdrmtlnf></rltdrmtlnf>	Irrelevant. Will be ignored.	ISO2009: N/A					
С	Credit Transfer Transaction Information <taxrmt> +Remittance Information ++Structured +++Tax Remittance</taxrmt>	Irrelevant. Will be ignored.	ISO2009: N/A					
C	Credit Transfer Transaction Information <grnshmtrmt> +Remittance Information ++Structured +++Garnishment Remittance</grnshmtrmt>	Irrelevant. Will be ignored.	ISO2009: N/A					
С	Credit Transfer Transaction Information <cdtragtacct> +Creditor Agent Account</cdtragtacct>	Irrelevant. Will be ignored.	ISO2009: N/A					
C	Credit Transfer Transaction Information <intrmyagt1acct> +Intermediary Agent 1Account</intrmyagt1acct>	Irrelevant. Will be ignored.	ISO2009: N/A					


Level	ISO field	Notes by PostFinance	<i>ISO2009</i> ISO2019	ZA 3: domestic ZA D: domestic	ZA 4: domestic FC ZA X: version 1	ZA 5: SEPA ZA S: SEPA	ZA 6: international ZA X: version 2	ZA 8: Cash international ZA C: Cash international
С	Credit Transfer Transaction Information +Creditor ++Postal Adress +++Building Name +++Floor +++Post Box +++Room +++Town Location Name +++District Name	New additional address elements Irrelevant. Will be ignored.	ISO2009: N/A					
C	Credit Transfer Transaction Information <prxy> +Creditor Account ++Proxy</prxy>	Irrelevant. Will be ignored.	ISO2009: N/A					
C	Credit Transfer Transaction Information <unitccy> +Exchange Rate Information ++Unit Currency</unitccy>	Irrelevant. Will be ignored.	ISO2009: N/A					
C	Credit Transfer Transaction Information <uetr> +Payment Identification ++UETR</uetr>	The UETR is issued by PostFinance. The delivered UETR will be ignored.	ISO2009: N/A					
В	Payment Information <dttm> +Requested Execution Date ++Date Time</dttm>	Irrelevant. Will be ignored. The desired execution date is still defined in the "Date" tag.	ISO2009: N/A					
A	Group Header <ctctdtls> +Initiating Party ++Contact Details</ctctdtls>	Recommended. Contains details of the software and implementation guide used to create the message.	ISO2009: N/A					

Level	ISO field	Notes by PostFinance	<i>ISO2009</i> ISO2019	<i>ZA 3: domestic</i> ZA D: domestic	ZA 4: domestic FC ZA X: version 1	<i>ZA 5: SEPA</i> ZA S: SEPA	ZA 6: international ZA X: version 2	ZA 8: Cash international ZA C: Cash international
A	Group Header <othr> +Initiating Party ++Contact Details +++Other</othr>	Maximum of four instances permitted.	ISO2009: NIA					
A	Group Header <chanltp> +Initiating Party ++Contact Details +++Other ++++Channel Type</chanltp>	4-digit code to designate the information type. The following codes are permitted: NAME – name of software PRVD – name of software provider VRSN – software version SPSV – SPS IGs version	ISO2009: N/A					
A	Group Header <ld> +lnitiating Party ++Contact Details +++Other ++++ldentification</ld>	Textual information corresponding to the code in the ChanlTp element: The software name is to be provided where the code NAME is indicated. The name of the software provider is to be provided where the code PRVD is indicated. The software version number is to be provided where the code VRSN is indicated. The SPS IGs version is to be provided where the code SPSV is indicated.	ISO2009: N/A					

#### 3.6 CH-DD ISO 20022 in XML format

Direct debit orders are processed by the payee as pain.008 (ISO 20022 format) XML messages.

pain.008 XML messages are structured as follows:



**A level:** Group header message level. This block occurs exactly once.

**B level:** Payment information side of the creditor (credit side). This block must occur at least once and usually contains several C levels.

**C level:** Direct debit transaction information side of the debtor (debit side). This block must occur at least once for each B level. It contains all C levels (transactions) related to the B level (credit).

The following should be noted for **CH-DD**:

- Within A level, all collections must relate either to Swiss Core Direct Debit or Swiss Business Direct Debit (pure types). In case of mixed incoming deliveries, all transactions will be rejected.
- The following are to be totalled for the entire message (A level):
- number of transactions (C level)
  - total amount (C level)
- PostFinance recommends to use postal account numbers in IBAN format. Notification is always made in IBAN format.
- Direct debit orders are provided with a due date. On that date, the debtor's account is debited. Also on that date, the creditor's account is credited. If this date falls on a non-postal working day, the due date is replaced by the following postal working day.
- If a pain.008 message contains any values in field Ultimate Creditor, the debtor, in addition to the account description, will also see the name of the invoicing party as per the Ultimate Creditor.
- In field Debtor, information on the debit account must be provided.
   In field Ultimate Debtor, details of the original debtor can be provided.
   The debtor will be notified of both information items.

### 3.7 pain.008 CH-DD direct debit order

Level	ISO field	pain.008 CH-DD
А	Message Identification <msgld></msgld>	Clear message identification. Clarity is checked in combination with element Initiating Party within 90 days.
А	Creation Date Time <credttm></credttm>	Recommendation: This should correspond to the actual date/time of creation.
А	Number Of Transactions <nboftxs></nboftxs>	Number of all C levels. If incorrect, the entire message will be rejected.
		Messages with more than 100,000 transactions (C levels) will be rejected by PostFinance.
А	<b>Control Sum</b> <ctrlsum></ctrlsum>	Sum of Instructed Amounts of all C levels. If incorrect, the entire message will be rejected.
A	Initiating Party <initgpty> +Id ++OrgId +++Othr ++++Id</initgpty>	Must include a clear sender ID agreed with the recipient. For CH-DD, this is normally RS-PID (subscriber number of the invoicing party with 17 digits). If a computer centre takes care of the file processing, an individual constant identifier can be inserted here.
A	Initiating Party <initgpty> +CtctDtls ++Nm +++Othr</initgpty>	Recommendation: Information on the software name and its version.
В	Payment Information Identification <pmtinfid></pmtinfid>	The order number within a message must be clear. Along with duplicate checking at A level, additional checks are made at B level. The value, together with Creditor Scheme Identification, Requested Collection Date and Payment Type Information, is used as the criterion for checking on double processing. Orders with the same identification will be rejected.
В	Payment Method <pmmtd></pmmtd>	Fixed value: DD
В	Payment Type Information <pmttpinf> ++SvcLvI +++Prtry</pmttpinf>	Only CH-DD is permitted.
В	Payment Type Information <pmttpinf> +LcIInstrm ++Prtry</pmttpinf>	Only codes DDCOR1 and DDB2B are permitted. A separate file must be supplied for each scheme.
В	Requested Collection Date <reqdcolltndt></reqdcolltndt>	For CH-DD, incoming delivery period D-1 applies. Incoming deliveries are accepted not earlier than two years before and not later than 90 calendar days after the desired processing date indicated. Files with more than 1,000 transactions can be supplied 90 calendar days before the due date at the earliest.
В	<b>Creditor</b> <cdtr></cdtr>	Details of the invoicing party are adopted from the master data, and the address data from element <pstiadr> of the message supplied.</pstiadr>
В	<b>Creditor</b> <cdtr> +PstIAdr</cdtr>	The address of the invoicing party is to be provided either – structured via subelements <strtnm>, <pstcd>, <twnnm>, <ctry> or – unstructured via subelements <ctry> und <adrline></adrline></ctry></ctry></twnnm></pstcd></strtnm>
В	<b>Creditor</b> <cdtr> ++PstlAdr +++AdrLine</cdtr>	If the address is provided unstructured, the element may be used max. twice and may contain max. 70 characters. PostFinance automatically inserts a line break after the first 35 characters if element Address Line is used only once. If the element is used twice, the first 35 characters of the second Address Line instance are adopted. Any characters from position 36 will be ignored.

Level	ISO field	pain.008 CH-DD
В	<b>Creditor Account</b> <cdtracct> +Id</cdtracct>	This element is to be used as follows: – IBAN or – proprietary account number in <othr>/<ld> It is recommended to use IBAN. Details of the credit account are ignored. The credit account is adopted from the master data of the CH-DD subscription.</ld></othr>
В	Creditor Account <cdtracct> +Id ++IBAN</cdtracct>	In case this element is used, it must contain a valid postal account number in IBAN format.
В	Creditor Account <cdtracct> +Id ++Othr +++Id</cdtracct>	The credit account number can be supplied in two different formats: VVXXXXXP VV = prefix XXXXX = serial no.; right-justified, to the left with zeros P = check digit as per Modulo 10 recursive or VV-XXXXXX-P VV = prefix XXXXXX = serial no.; right-justified, to the left without zeros P = check digit as per Modulo 10 recursive
В	Creditor Agent <cdtragt> +FinInstnld ++ClrSysMmbld +++Mmbld</cdtragt>	Institution identification of the financial institution of the invoicing party. Fixed value: 09000 (PostFinance clearing no.)
В	Creditor Agent <cdtragt> +FinInstnId ++Othr</cdtragt>	Must not be used.
В	<b>Ultimate Creditor</b> <ultmtcdtr> +Nm</ultmtcdtr>	In this element, details of the invoicing party can be provided which will be notified to the direct debit payer. The element can contain max. 70 characters. PostFinance automatically inserts a line break after the first 35 characters. The element can be used at B level or C level but not at both of them at the same time. If used here at B level, this ultimate creditor will apply to all C levels.
В	<b>Ultimate Creditor</b> <ultmtcdtr> +PstIAdr</ultmtcdtr>	The address of the invoicing party is to be provided either structured or unstructured.
В	Creditor Scheme Identification <cdtrschmeld> +Id ++PrvtId +++Othr ++++Id</cdtrschmeld>	Here, RS-PID must be provided (17-digit subscriber number of the invoicing party).
В	Creditor Scheme Identification <cdtrschmeld> +Id ++PrvtId +++Othr ++++SchmeNm +++++Prtry</cdtrschmeld>	Code CHDD must be supplied.

Level	ISO field	pain.008 CH-DD
С	Payment Identification <instrid></instrid>	Clear transaction identification.
С	Payment Identification <endtoendid></endtoendid>	For automated accounts receivable accounting, use of a clear end-to-end ID is strongy recommended.
С	Instructed Amount <instdamt></instdamt>	The order is to be supplied with pure currencies (CHF or EUR) and must match the currency of the credit account. The amount must be between 0.01 and 999,999,999.99.
С	<b>Ultimate Creditor</b> <ultmtcdtr> +Nm</ultmtcdtr>	In this element, details of the invoicing party can be supplied which will be notified to the direct debit payer.
	+1111	The element may contain max. 70 characters. PostFinance automatically inserts a line break after the first 35 characters.
		Can be used at B level or C level but not at both of them at the same time.
С	<b>Ultimate Creditor</b> <ultmtcdtr> +PstlAdr</ultmtcdtr>	The address of the invoicing party is to be provided either – structured via subelements <strtnm>, <pstcd>, <twnnm>, <ctry> or – unstructured via subelements <ctry> und <adrline></adrline></ctry></ctry></twnnm></pstcd></strtnm>
С	<b>Debtor Agent</b> <dbtragt> +FinInstnld</dbtragt>	Subelement <cirsysmmbid> must be supplied.</cirsysmmbid>
С	Debtor Agent <dbtragt> +FinInstnld ++ClrSysMmbld +++Mmbld</dbtragt>	Must be used. Fixed value: 09000 (PostFinance clearing no.)
С	Debtor	In this element, the name of the debit account holder (account description) must be supplied.
	<dbtr> +Nm</dbtr>	The element may contain max. 70 characters. PostFinance automatically inserts a line break after the first 35 characters.
С	<b>Debtor</b> <dbtr> +PstlAdr</dbtr>	PostFinance recommends to supply the address of the debit account holder in structured form via subelements <strtnm>, <pstcd>, <twnnm>, <ctry>.</ctry></twnnm></pstcd></strtnm>
С	<b>Debtor</b> <dbtr> ++PstlAdr +++AdrLine</dbtr>	If the address is provided unstructured, the element may be used max. twice and may contain max. 70 characters for each element. PostFinance automatically inserts a line break after the first 35 characters if element Address Line is used only once. If the element is used twice, the first 35 characters of the second Address Line instance are adopted. Any characters from position 36 will be ignored.
С	<b>Debtor Account</b> <dbtracct> +Id</dbtracct>	Use this element as follows: – IBAN or – proprietary account number in <othr>/<id></id></othr>
		PostFinance recommends to use IBAN. Notification will always be made with IBAN.
С	Debtor Account <dbtracct> +Id ++IBAN</dbtracct>	If this element is used, it must contain a valid postal account number in IBAN format.

Level	ISO field	pain.008 CH-DD
С	Debtor Account <dbtracct> +ld ++Othr +++ld</dbtracct>	The debit account number can be supplied in two different formats: VVXXXXXP VV = prefix XXXXXX = serial no.; right-justified, to the left with zeros P = check digit as per Modulo 10 recursive or VV-XXXXXX-P VV = prefix XXXXXX = serial no.; right-justified, to the left without zeros P = check digit as per Modulo 10 recursive
С	Ultimate Debtor <ultmtdbtr> +Nm</ultmtdbtr>	In this element, details of the invoice recipient can be supplied. The element may contain max. 70 characters. PostFinance automatically inserts a line break after the first 35 characters.
С	<b>Ultimate Debtor</b> <ultmtdbtr> +PstlAdr</ultmtdbtr>	The address of the invoice recipient is to be provided either structured or unstructured.
С	<b>Remittance Information</b> <rmtlnf></rmtlnf>	May only be used unstructured.
С	<b>Remittance Information</b> <rmtlnf> +Ustrd</rmtlnf>	Message to the direct debit payer. The element may contain max. 140 characters. PostFinance automatically inserts a line break after the first 35 characters.
С	Remittance Information <rmtlnf> +Strd</rmtlnf>	Must not be used.

#### 3.8 pain.002 status report

pain.002 XML messages are structured as follows

D	ocument (Message)
	A-Level Group Header [11]
	<b>B-Level</b> Original Group Information and Status [11]
	<b>C-Level</b> Original Payment Information and Status [11]
	<b>D-Level</b> Transaction Information and Status [0n]

**A level:** Group header. This block occurs exactly once.

**B level:** Information on the original group and status. This block occurs exactly once.

**C level:** Information on the original payment order and status. This block occurs exactly once in pain.002.

**D level:** Information on the original transaction and status. This block can occur up to n times.

### 3.8.1 EPO

In element Status Reason Code, PostFinance sends out the ISO Status Reason Codes according to the Payments External Code List

### (see iso20022.org).

- In addition to the status reason codes, additional unstructured information is supplied in element Additional Information. The text is always issued in the respective language of the customer (according to master data). For this reason, PostFinance basically recommends to set up parameterisable error handling in the payment and finance software.
- If the status reason must not be shown due to regulatory requirements, PostFinance reserves the right to suppress such information. In such a case, Status Reason Code MS03 from the External Code List is used and the text of the return reason is shown by the payment service provider unspecified in element Additional Information.
- PostFinance always sends out a pain.002 for each order (B level).
   For this reason, pain. 002 messages do not contain the group status but the payment information or transaction status (AOS). The following matrix displays the use of the status.

pain.001	pain.002 pro	ocessing messag	e (status messa	ige)				
	Status	Original IDs from pain.001						
Errors at	Group	Payment Inf	Transaction	Message	Payment	Instruction	EndToEnd	
Entire message; (A / B / C level) XSD-failed		RJCT		×	NOT PROVIDED <sup>1</sup>			
Errors at	Group	Payment Inf	Transaction	Message	Payment	Instruction	EndToEnd	
B level (some or all)		RJCT		×	×			
C level (all)		RJCT	RJCT	×	×	×	×	
C level (some of a B level))		PART	RJCT	×	×	×	×	
Warnings at	Group	Payment Inf	Transaction	Message	Payment	Instruction	EndToEnd	
B level (some or all)		ACWC		×	×			
C level (some or all)		ACWC	ACWC	×	×	×	×	
No errors	Group	Payment Inf	Transaction	Message	Payment	Instruction	EndToEnd	
B level		ACCP		×	×			

x: The corresponding original reference from the respective pain.001 message is shown ACCP: Accepted

 RJCT:
 Rejected

 PART:
 Partially Accepted

 ACWC:
 Accepted with Change

<sup>1</sup> In case of an infraction of the XSD schema, the payment ID cannot be determined. Value NOT PROVIDED is shown in element OrgnIPmtInfld.

- In line with Swiss requirements, PostFinance, in addition to sending out a processing message when an order is placed (pain.002), also sends out a processing message upon its execution:
  - if the status of the order has been cancelled
  - if the status of the order has been executed and individual orders were cancelled during execution and/or there are any warnings
- With channels FDS (file delivery services), MFTPF (Managed File Transfer PostFinance) and SWIFT FileAct, the customer additionally receives a confirmation of receipt at message level (A level) via pain.002 if the message structure (XSD schema) is correct (GroupStatus = ACTC) or erroneous (GroupStatus = RJCT). Technical confirmation of receipt can be activated on request for the EBICS channel and e-finance. The following matrix shows the use of the status for the technical confirmation of receipt:

pain.001	pain.002: technical confirmation of receipt						
	Status			Original IDs from pain.001			
Errors at	Group	Payment Inf	Transaction	Message	Payment	Instruction	EndToEnd
A level	RJCT			×			
No errors	Group	Payment Inf	Transaction	Message	Payment	Instruction	EndToEnd
A level	ACTC			×			

×: The corresponding original reference from the respective pain.001 message is shown. If the message ID from pain.001 cannot be determined by the system, value "UNKNOWN" is returned.

RJCT: Rejected

ACTC: Accepted Technical Validation

### 3.8.2 CH-DD Direct Debit

The creditor will be informed by PostFinance via pain.002 of the status of the CH-DD Direct Debit order (B level) and the transactions (C level) and any errors they contain.

PostFinance always sends out a pain.002 for each order (B level). This is why pain.002 messages do not contain a group status but the payment information or transaction status. The following matrix displays the use of the status:

pain.008	pain.002 pro	cessing messag	e (customer pa	ner payment status report)							
	Status			Original IDs fi	om pain.008						
Errors at	Group	Payment Inf	Transaction	Message	Order	Instruction	EndToEnd				
Entire message (A / B and/or C level); XDS failed (only FDS, MFTPF and SWIFT FileAct)	RJCT			×							
B level (some or all)		RJCT		×	×						
C level (all)		RJCT	RJCT	×	×	×	×				
C level (some of a B level)		PART	RJCT	×	×	×	×				
Warnings at	Group	Payment Inf	Transaction	Message	Order	Instruction	EndToEnd				
B level (some or all)		ACWC		×	×						
C level (some or all)		ACWC	ACWC	×	×	×	×				
No errors	Group	Payment Inf	Transaction	Message	Order	Instruction	EndToEnd				
Entire message (A / B / C levels); XDS correct (only FDS, MFTPF and SWIFT FileAct)	ACTC			x							
B level		ACCP		×	×						

×: The corresponding original reference from the respective pain.008 message is isssued.

ACCP: Accepted: Checking of syntax and semantics was successful throughout all B and C levels.

ACTC: Accepted: Checking of syntax and semantics was successful throughout all A, B and C levels (pain.002 only with channels FDS, MFTPF and SWIFT FileAct).

ACWC: Accepted with Change: The entire message is accepted.

PART: Partially accepted: a B level or several B levels were not correct, or a C level or several C levels of a B level were not correct.

RJCT: Rejected: If in the group status: The entire message is rejected. An A, B and/or C level are not correct (pain.002 only with channels FDS, MFTPF and SWIFT FileAct). If payment information: All transactions of the corresponding B level are rejected.

### 3.9 Structure of camt message types and size limitations



**A level:** Message level. This block occurs exactly once and contains elements with validity for all transactions.

**B level:** Account level. This block occurs exactly once and contains elements for account and booking information and for account movements.

**C level:** Booking level. This block can occur several times and contains elements for displaying booking details.

**D level:** Transaction level. This block can occur several times and contains elements for displaying transaction details from the related C level bookings.

camt message types are subject to a technical size limitation according to the following principle:

- IBAN payments are always bundled into a C level after max. 1,000 transactions (D level), that is, if the customer is notified of more than 1,000 transactions, he will receive a camt message with a 1-n C level and D level.
- For OSR / CH-DD / QR bill virtual account / returns, a subsequent file is always generated after 99,999 transactions (D level).

Files are split as follows:

- camt.053 after 99,999 transactions at D levels

An entry with 1-n transactions at C level is never split.

When notifications are sent out, account purity applies. A file is generated and sent out for each account and notification type.

I

**3.10 camt.052 intraday account movements** The following camt message type refers to V4/2013. If V8/2019 differs from this, it is marked with "ISO V2019:".

Level	ISO field	camt.052
A	Message Identification <msgld></msgld>	Clear message identification. Always supplied by PostFinance.
А	Creation Date Time <credttm></credttm>	Creation date and time of a message. Always supplied by PostFinance.
A	BICFI <anybic></anybic>	Only supplied if sent to channel SWIFT FileAct.
A	<b>Page Number</b> <pgnb></pgnb>	Used to number several camt messages within intraday account documents. Always supplied by PostFinance. Example 1: camt message not split = value 1 & last page indicator value TRUE Example 2: camt message split: File 1 = value 1 & last page indicator value FALSE. File 2 = value 2 & last page indicator value TRUE.
A	Last Page Indicator <lastpgind></lastpgind>	This element indicates whether a given message is the last one in an intraday document. If a statement has to be split over several messages due to (customer-specific or technical) size limitations, this element will be FALSE in the first messages and TRUE in the last message.
A	Additional Information <addtlinf></addtlinf>	Indicates the type of the notification. Possible values: "SPS/1.7/PROD" for a productive message ISO V2019: "SPS/2/PROD" for a productive message
В	Identification <ld></ld>	Clear identification. Always supplied by PostFinance. Elements group header/message identification and statement/identification are not identical. A and B level attribute forms must be unique separately from each other.
В	Electronic Sequence Number <elctrncseqnb></elctrncseqnb>	This value is always supplied by PostFinance and represents the consecutive statement number of a given year on the basis of the postal working day.
В	Creation Date Time <credttm></credttm>	Creation date and time of a message. Always supplied by PostFinance.
В	From To Date <frtodt></frtodt>	Supplies the start date and the end date of a message. Always supplied by PostFinance.
В	IBAN <iban></iban>	PostFinance always supplies the IBAN of the underlying message; no proprietary account formats.
В	Acct +Tp ++Cd	ISO V2019: Codes account category: SVGS (Savings account) TRAN (Current account and payment transaction account)
В	Acct +Ccy	ISO V2019: specification of the currency in which the account in managed.
В	Acct +Nm	ISO V2019: Account designation: Private Account Private Saving Account Business Account Business Bank Account Operation Account Loro Account
В	Acct +Ownr ++Nm	Account description of the relevant account. Always supplied by PostFinance.

Level	ISO field	camt.052
В	<b>Balance</b> +Tp ++CdOrPrtry +++Code <cd></cd>	The following codes are used: OPBD for the opening balance, ITBD for the preliminary closing balance and XPCD for the credit available in future.
В	Balance +Tp ++SubTp +++Code <cd></cd>	In case of a file split, code INTM is used for the interim balance.
В	Amount <amt></amt>	Amount and currency of the relevant balance.
В	Credit Debit Indicator <cdtdbtind></cdtdbtind>	Information as to whether the relevant account balance is positive or negative.
В	Date <dt></dt>	Date of the relevant balance.
С	Amount <amt></amt>	Amount of booking. The amount of field Amount at C level is shown in the account currency.
С	<b>Currency</b> <ccy></ccy>	Currency of booking. The currency of field Currency at C level is identical with the account currency. Note: The currency is always included as an attribute of element Amount. E.g.: <amt ccy="CHF">1000</amt>
С	<b>Debit Credit Indicator</b> <cdtdbtind></cdtdbtind>	Indicator of a debit or credit booking Credit = CRDT, Debit = DBIT
С	<b>Reversal Indicator</b> <rvslind></rvslind>	Normal booking = False Reversal booking = True
С	Entry +Sts ++Cd	Status of booking. PostFinance always supplies value BOOK. ISO V2013: BOOK value is delivered in the <sts> element ISO V2019: BOOK value is delivered in the <cd> subelement</cd></sts>
С	<b>Booking Date</b> BookgDt+Dt	Date of booking. Always supplied by PostFinance.
С	<b>Value Date</b> ValDt+Dt	Value date of booking. Always supplied by PostFinance.
С	Account Servicer Reference AcctSvcrRef	Clear booking reference assigned by the financial institution.
С	Bank Transaction Code +BkTxCd ++Domn +++Cd ++Fmly +++Cd +++SubFmlyCd	This element gives information on the type of booking.
С	<b>NtryDtls</b> +AddtlNtryInf	Here, PostFinance always supplies the booking text.
	<b>Message ID</b> Refs ++Msgld	Message identification (A level) from the original order message (e.g., from pain.001). This value is supplied only if there is a corresponding order.
D	Account Servicer Reference Refs ++AcctSvcrRef	Clear transaction ID assigned by PostFinance.

Level	ISO field	camt.052
D	Payment Information Identification Refs ++PmtInfld	Payment information identification (B level) from the original order message (e.g., from pain.001). This value is supplied only if there is a corresponding order.
D	Instruction Identification Refs ++InstrID	Instruction Identification (C level) from the original order message (e.g., from pain.001). This value is supplied only if there is a corresponding order.
D	End To End Identification Refs ++EndToEndId	End-to-end identification (C level) from the original order message (e.g., from pain.001). This value is supplied only if there is a corresponding order.
D	Unique End To End Transaction Reference Refs ++UETR	Unique end-to-end transaction reference. Always assigned by PostFinance; even if a UETR is delivered in pain.001. UETR from interbank payment transactions are taken 1:1.
D	Amount Amt	Amount of booking, corresponds to the amount at C level
D	Currency	Currency of booking. Corresponds to the currency at C level.
D	Credit Debit Indicator CdtDbtInd	Indicator of a debit or credit booking Credit = CRDT Debit = DBIT
		The remaining D level attributes are not supplied.

### 3.11 camt.053 account statement

Level	ISO field	Notification in case of camt.053 having no detailed notification	Notification in case of camt.053 having detailed notification	IBAN	IBAN with Creditor Reference	QR bill virtual account	OSR	Return	CH-DD	Remaining bookings (price, amounts carried over, cards, etc.)	
A	<b>Message Identification</b> <msgld></msgld>	Yes	Yes	Clear message ide	entification. Always	supplied by PostFin	ance.				
А	Creation Date Time <credttm></credttm>	Yes	Yes	Creation date and	I time of the messa	ge. Always supplied	by PostFinance.				
А	<b>BICFI</b> <anybic></anybic>	Yes	Yes	Only supplied if se	ent to channel SWIF	T FileAct.					
A	<b>Page Number</b> <pgnb></pgnb>	Yes	Yes	Example 1: camt r	ed to number several camt messages within one account statement. Always supplied by PostFinance. ample 1: camt message not split = value 1 & last page indicator value TRUE ample 2: camt message split: File 1 = value 1 & last page indicator value FALSE. File 2 = value 2 & last page indicator value TRUE						
А	Last Page Indicator <lastpgind></lastpgind>	Yes	Yes					ment. If a statement ha			
A	Additional Information <addtlinf></addtlinf>	Yes	Yes	"SPS/1.7/PROD" f "SPS/1.7/TEST" fc "SPS/1.7/Reconstr ISO V2019: "SPS/2/PROD" for "SPS/2/TEST" for	uction" for a repea	ssage t order age					
В	<b>Identification</b> <ld></ld>	Yes	Yes		n. Always supplied eader/Message Ider		ement/Identification	are not identical. A an	d B attributes must be	e unique separately from	
В	Electronic Sequence Number <elctrncseqnb></elctrncseqnb>	Yes	Yes	This value is alway	s supplied by PostFir	nance and represent	s the consecutive st	atement number of a gi	ven year on the basis o	f the post working day.	
В	Creation Date Time <credttm></credttm>	Yes	Yes	Creation date and	time of the messa	ge. Always supplied	by PostFinance.				

Level	ISO field	Notification in case of camt.053 having no detailed notification	Notification in case of camt.053 having detailed notification	IBAN	IBAN with Creditor Reference	QR bill virtual account	OSR	Return	CH-DD	Remaining bookings (price, amounts carried over, cards, etc.)	
В	From To Date <frtodt></frtodt>	Yes	Yes	Supplies the start	date and the end da	ate of the account st	atement. Always s	upplied by PostFinance			
В	CopyDuplicate Indicator <cpydplctind></cpydplctind>	Yes	Yes	This field is suppli	field is supplied with value DUPL only in case of reconstruction.						
В	IBAN <iban></iban>	Yes	Yes	PostFinance alway	ys supplies the IBAN	of the underlying ac	count statement; i	no proprietary account	formats.		
В	Acct +Tp ++Cd	Yes	Yes	SVGS (Savings ac	es account category: count) ccount and payment	transaction account	)				
В	Acct +Ccy	Yes	Yes	ISO V2019: speci	fication of the currer	ncy in which the acc	ount in managed.				
В	Acct +Nm	Yes	Yes	ISO V2019: Acco Private Account Private Saving Ac Business Account Business Bank Ac Operation Account Loro Account	count t count						
В	Acct +Ownr ++Nm	Yes	Yes	Account description	on of the correspond	ding account. Alway	s supplied by PostF	ïnance.			
В	Balance +Tp ++CdOrPrtry +++Code <cd></cd>	Yes	Yes	The codes OPBD a The codes CLAV (	are used for the ope is always delivered) a	ning balance and CL and FWAV are used t	BD for the closing for the value date l	balance. balance and the future	value data balance.		
В	<b>Balance</b> +Tp ++SubTp +++Code <cd></cd>	Yes	Yes	In case of a file sp	lit, code INTM for th	e interim balance is	used.				

Level	ISO field	Notification in case of camt.053 having no detailed notification	Notification in case of camt.053 having detailed notification	IBAN	IBAN with Creditor Reference	QR bill virtual account	OSR	Return	CH-DD	Remaining bookings (price, amounts carried over, cards, etc.)
В	<b>Amount</b> <amt></amt>	Yes	Yes	Amount and curre	ency of the correspor	nding balance.				
В	Credit Debit Indicator <cdtdbtind></cdtdbtind>	Yes	Yes	Information as to	ormation as to whether the relevant account balance is positive or negative.					
В	Date <dt></dt>	Yes	Yes	Date of the corres	of the corresponding balance.					
C	Entry Reference	Yes	Yes	N/A	In the case of batch entries, the IBAN will be inserted.	In the case of batch entries, the QR-IBAN will be inserted.	The subscriber number in proprietary format is displayed (e.g., XXXXXXXXX).	N/A	The contract number (RS-PID) is displayed.	N/A
					vs supplies a value; re nd remaining bookin		h booking/single boo	king" booking logic a	and with or without a	reference (does not
С	<b>Amount</b> <amt></amt>	Yes	Yes	Amount of bookir The amount in fie		is shown in the acco	unt currency.			
С	<b>Currency</b> <ccy></ccy>	Yes	Yes		eld Currency at C lev	el is identical with the as an attribute of eler	e account currency. ment Amount. E.g.: <	Amt Ccy=CHF>1000		
С	Debit Credit Indicator <cdtdbtind></cdtdbtind>	Yes	Yes	Indicator of a deb Credit = CRDT Debit = DBIT	it or credit booking					
С	<b>Reversal Indicator</b> <rvslind></rvslind>	Yes	Yes	Normal processing Reversal bookings	g / correction bookin s = True	g = False		True	Normal entry = False Return and refund = True	Normal processing/ entry correction = False Reverse entries = True
С	<b>Entry</b> +Sts ++Cd	Yes	Yes	ISO V2013: BOOK	value is delivered in	supplies value BOOK the <sts> element the <cd> subelemer</cd></sts>				
С	<b>Booking Date</b> BookgDt+Dt	Yes	Yes	Date of booking.	Always supplied by F	ostFinance.				

Level	ISO field	Notification in case of camt.053 having no detailed notification	Notification in case of camt.053 having detailed notification	IBAN	IBAN with Creditor Reference	QR bill virtual account	OSR	Return	CH-DD	Remaining bookings (price, amounts carried over, cards, etc.)
С	<b>Value Date</b> ValDt+Dt	Yes	Yes	Value date of book	king. Always supplie	d by PostFinance.				
С	Account Servicer Reference AcctSvcrRef	Yes	Yes	Clear booking refe	ear booking reference assigned by the financial institution.					
С	Bank Transaction Code +BkTxCd ++Domn +++Cd ++Fmly +++Cd +++SubFmlyCd	Yes	Yes	This element gives	information on the	type of booking.				
С	<b>Chrgs</b> +TtlChrgsAndTaxAmt	No	Yes	Total charges for the end of each monthe		re debited to the char	rges account at the	N/A	Total charges for this booking which are debited to the charges account at the end of each month.	N/A
С	<b>Chrgs</b> +TtlChrgsAndTax- AmtCcy	No	Yes	Currency of total c account at the enc		king which are debited	d to the charges	N/A	Currency of total charges for this booking which are debited to the charges account at the end of each month.	N/A
C	Charge Record Type Chrgs +Rcrd ++Tp +++Prtry	No	Yes	Categorization of c 1 = Reject 2 = Inpayments at 4 = Post-processing 5 = Full recording	post office		Categorisation of charges 1 = Reject 6 = Outpayments at post office	N/A	Categorisation of charges 9 = Charge for CH-DD refund	N/A

<sup>1</sup> Notification for single bookings only and not for bulk bookings

Level	ISO field	Notification in case of camt.053 having no detailed notification	Notification in case of camt.053 having detailed notification	IBAN	IBAN with Creditor Reference	QR bill virtual account	OSR	Return	CH-DD	Remaining bookings (price, amounts carried over, cards, etc.)
С	Charges by Record Type Chrgs <sup>1</sup> +Rcrd ++Amt	No	Yes	Total charges for t	the corresponding o	ategory at booking l	evel.	N/A	Total charges for the corresponding category at booking level.	N/A
С	Charges by Record Type Chrgs <sup>1</sup> +Rcrd ++Amt Ccy	No	Yes	Currency of total at booking level.	cy of total charges for the corresponding category N/A Currency of total charges for the corresponding category at booking level.					
С	<b>Chrgs <sup>1</sup></b> +Rcrd ++CdtDbtInd	No	Yes		the charge shows large) or negative ((	a positive CRDT = refund) amot	N/A	Indicator whether the charge shows a positive (DBIT = regular charge) or negative (CRDT = refund) amount.	N/A	
C	<b>Chrgs <sup>1</sup></b> +Rcrd ++ChrgInclInd	No	Yes	(e.g., debiting at t		ted from the booking Here, PostFinance alv re value False.		N/A	Indicator whether charges are deducted from the booking amount or not (e.g., debiting at the end of month). Here, PostFinance always supplies a reference to the charges and there- fore value False.	N/A
С	Intrst +Rcrd ++Amt Ccy	Yes	Yes							ISO V2019: Amount and currency of the gross interest and/ or withholding tax for interest bookings.

Manual Technical Specifications Version April 2025

Level	ISO field	Notification in case of camt.053 having no detailed notification	Notification in case of camt.053 having detailed notification	IBAN	IBAN with Creditor Reference	QR bill virtual account	OSR	Return	CH-DD	Remaining bookings (price, amounts carried over, cards, etc.)
С	<b>Intrst</b> +Rcrd ++CdtDbtInd	Yes	Yes							ISO V2019: Indicator of whether the gross interest and/or withholding tax is a credit or debit.
C	Intrst +Rcrd ++Tp +++Prtry	Yes	Yes							ISO V2019: Additional information for the account interest settlement: INTE: gross interest WHLD: withholding tax
С	<b>NtryDtls</b> +Batch ++NbOfTxs	No	Yes	Number of transac	ctions (D level) of the	e corresponding bool	king (C level).			N/A
С	<b>NtryDtls</b> +AddtlNtryInf	Yes	Yes	Here, PostFinance	always supplies the	booking text.				
D	<b>Message ID</b> Refs ++MsgId	Yes <sup>1</sup>	Yes			he original order Ilue is supplied only if	N/A	Message identificat the original order n pain.001). This valu if there is a corresp	nessage (e.g., from ie is supplied only	N/A
D	Account Servicer Reference Refs ++AcctSvcrRef	Yes	Yes		D assigned by PostF tory requirement for	inance. r enquiries, except for	return.			
D	Payment Information Identification Refs ++PmtInfId	Yes <sup>1</sup>	Yes	original order mes	ion identification (B sage (e.g., from pair ied only if there is a		N/A	Payment informatic level) from the orig (e.g., from pain.00 supplied only if the order.	inal order message	N/A

<sup>1</sup> Notification for single bookings only and not for bulk bookings

Level	ISO field	Notification in case of camt.053 having no detailed notification	Notification in case of camt.053 having detailed notification	IBAN	IBAN with Creditor Reference	QR bill virtual account	OSR	Return	CH-DD	Remaining bookings (price, amounts carried over, cards, etc.)
D	Instruction Identification Refs ++InstrID	Yes <sup>1</sup>	Yes			the original order lue is supplied only if	N/A	Instruction identification the original order message (e.g. This value is supplie corresponding orde	., from pain.001). d only if there is a	N/A
D	End To End Identification Refs ++EndToEndId	Yes <sup>1</sup>	Yes			n the original order lue is supplied only if	N/A	End-to-end identific the original order message (e.g. This value is supplie corresponding orde	ed only if there is a	N/A
D	Unique End-to-end Transaction Reference Refs ++UETR	Yes <sup>1</sup>	Yes	by PostFinance; ev	d transaction referer ven if a UETR is deliv ank payment transac		N/A	Unique end-to- end transaction reference. Always assigned by PostFinance; even if a UETR is delivered in pain.001. UETR from interbank payment transactions are taken 1:1.	N/A	N/A
D	<b>Type</b> Refs +Prtry ++Tp	No	Yes	Value for QR paym	nents: 00 = QRR		Values for OSR: 06 = OSR counter 46 = OSR+ counter	N/A	N/A	N/A
D	<b>Propriety Reference</b> Refs +Prtry ++Ref	No	Yes	Unique number of	<sup>F</sup> paper-based payme	ents.		N/A	N/A	N/A
D	<b>Amount</b> Amt	Yes	Yes	Amount of transac The amount in fiel		is shown in the accou	unt currency.			

<sup>1</sup>Notification for single bookings only and not for bulk bookings

Level	ISO field	Notification in case of camt.053 having no detailed notification	Notification in case of camt.053 having detailed notification	IBAN	IBAN with Creditor Reference	QR bill virtual account	OSR	Return	CH-DD	Remaining bookings (price, amounts carried over, cards, etc.)
D	Currency	Yes	Yes		eld Currency at C lev	vel is identical with the as an attribute of ele		:Amt Ccy=CHF>1000		
D	<b>Credit Debit</b> Indicator CdtDbtInd	Yes	Yes	N/A	Indicator of a deb Credit = CRDT Debit = DBIT	it or credit booking				
D	<b>Transaction Amount</b> AmtDtls ++TxAmt +++Amt	No	Yes	Corresponds to th currency.	ne transaction amou	nt in the transaction	N/A	Corresponds to the transaction amount in the transaction currency.	N/A	N/A
D	<b>Source Currency</b> AmtDtls ++TxAmt +++CcyXchg ++++SrcCcy	No	Yes	Corresponds to th	e transaction currenc	y.	N/A	Corresponds to the transaction currency.	N/A	N/A
D	<b>Target Currency</b> AmtDtls ++TxAmt +++CcyXchg ++++TrgtCcy	No	Yes	Corresponds to th	ne account currency.		N/A	Corresponds to the account currency.	N/A	N/A
D	Exchange Rate AmtDtls ++TxAmt +++CcyXchg ++++XchgRate	No	Yes	Exchange rate app currency.	lied between transad	ction and account	N/A	Exchange rate applied between transaction and account currency.	N/A	N/A

Level	ISO field	Notification in case of camt.053 having no detailed notification	Notification in case of camt.053 having detailed notification	IBAN	IBAN with Creditor Reference	QR bill virtual account	OSR	Return	CH-DD	Remaining bookings (price, amounts carried over, cards, etc.)
D	Bank Transaction Code +BkTxCd ++Domn +++Cd ++Fmly +++Cd +++SubFmlyCd	No	Yes	ZAG-DAG: PMNT R Electronic: PMNT RC SIC: PMNT RCDT AT <b>Reversal transacti</b> QRR Swiss Post brai ZAG-DAG: PMNT R Electronic: PMNT RC SIC: PMNT RCDT CA <b>Correction transac</b>	nch: PMNT CNTR CDI ICDT DMCT CDT AUTT TXN ion: nch: PMNT CNTR CAJ ICDT CAJT CDT CAJT AJT ction: nch: PMNT CNTR CDI ICDT DMCT CDT AUTT	IT	Normal transaction: OSR Swiss Post branch: PMNT CNTR CWDL PO-SO: PMNT ICDT DMCT Reversal transaction: OSR Swiss Post branch: PMNT CNTR DAJT PO-SO: PMNT ICDT DAJT Correction transaction: OSR Swiss Post branch: PMNT CNTR CWDL PO-SO: PMNT ICDT DMCT	Normal transaction: PMNT ICDT RRTN	Normal transaction: CH-DD Cor1 credit: PMNT IDDT PMDD CH-DD B2B credit: PMNT IDDT PMDD <b>R-transaction:</b> CH-DD Cor1 objection to debit: PMNT IDDT PRDD <b>Reversal</b> transaction: CH-DD Cor1 full reversal of debit: PMNT IDDT PRDD CH-DD B2B full reversal of debit: PMNT IDDT PRDD CH-DD B2B full reversal of debit: PMNT IDDT PRDD CH-DD B2B	N/A
D	<b>Chrgs</b> +TtlChrgsAndTaxAmt	No	Yes	Total charges for th end of each month		is debited to the charg	ges account at the	N/A	Total charges for this transaction which are debited to the charges account at the end of each month.	N/A
D	<b>Chrgs</b> +TtlChrgsAndTaxAmtCcy	No	Yes	Currency of total cl account at the end		ction which are debite	ed to the charges	N/A	Currency of total charges for this transaction which are debited to the charges account at the end of each month.	N/A

Level	ISO field	Notification in case of camt.053 having no detailed notification	Notification in case of camt.053 having detailed notification	IBAN	IBAN with Creditor Reference	QR bill virtual account	OSR	Return	CH-DD	Remaining bookings (price, amounts carried over, cards, etc.)
D	<b>Chrgs</b> +Rcrd ++Tp +++Prtry	No	Yes	Categorisation of c 1 = Reject 2 = Inpayments at 4 = Post-processing 5 = Full recording	at post counter		Categorisation of charges: 1 = Reject 6 = Outpayments at post counter	N/A	Categorisation of charges: 9 = Charge for CH-DD refund	N/A
D	<b>Chrgs</b> +Rcrd ++Amt	No	Yes	Total charges for t	he corresponding ca	tegory at transaction	level.	N/A	Total charges for the corresponding category at transaction level.	N/A
D	<b>Chrgs</b> +Rcrd ++Amt Ccy	No	Yes	Currency of total c	harges for the corres	ponding category at ti	ransaction level.	N/A	Currency of total charges for the corresponding category at transaction level.	N/A
D	<b>Chrgs</b> +Rcrd ++CdtDbtInd	No	Yes	Indicator whether t (CRDT = refund) ar		/e (DBIT = regular cha	rge) or a negative	N/A	Indicator whether the charge is a positive (DBIT = regular charge) or a negative (CRDT = refund) amount.	N/A
D	<b>Chrgs</b> +Rcrd ++ChrgInclInd	No	Yes		l of month). Here, Po	l from the transaction stFinance always supp		N/A	Indicator whether charges are deducted from the transaction amount or not (e.g., debiting at the end of month). Here, PostFinance always supplies a reference to the charges and therefore value False.	N/A

Level	ISO field	Notification in case of camt.053 having no detailed notification	Notification in case of camt.053 having detailed notification	IBAN	IBAN with Creditor Reference	QR bill virtual account	OSR	Return	CH-DD	Remaining bookings (price, amounts carried over, cards, etc.)
D	<b>Debtor Name</b> RltdPties ++Dbtr +++Pty (only V2019) ++++Nm	No	Yes	Name of debtor if	available.		N/A	Name of debtor if available.	Name of debtor.	N/A
D	Debtor Postal Address RltdPties ++Dbtr +++Pty (only V2019) ++++PstlAdr	No	Yes	Address of debtor ever possible, othe		supplied structured if	N/A	Address of debtor if supplied structured i otherwise unstructu	if ever possible,	N/A
D	<b>Debtor Account</b> RltdPties ++DbtrAcct	No	Yes	Account number (I debtor if available.	BAN or proprietary a	account format) of	N/A	Account number (IBAN or proprie- tary account format) of debtor if available.	Account number (IBAN) of debtor.	N/A
D	Ultimate Debtor RltdPties ++UltmtDbtr +++Pty (only V2019) ++++Nm	No	Yes	Original payer's na	me; if available.		N/A	Name of orginal deb Supplied only in case payment procedure customer [debtor] w [ultimate debtor]).	e of a multilevel (e.g., business	N/A
D	Ultimate Debtor RltdPties ++UltmtDbtr +++Pty (only V2019) ++++PstlAdr	No	Yes	Original payer's ad	dress; if available.		N/A	Name of orginal deb Supplied only in case payment procedure customer [debtor] w [ultimate debtor]). D structured if ever po unstructured.	e of a multilevel (e.g., business rith several divisions rata is supplied	N/A
D	Creditor Name RltdPties ++Cdtr +++Pty (only V2019) ++++Nm	No	Yes	N/A	N/A	N/A	Name of debtor if available.	N/A	N/A	N/A

Level	ISO field	Notification in case of camt.053 having no detailed notification	Notification in case of camt.053 having detailed notification	IBAN	IBAN with Creditor Reference	QR bill virtual account	OSR	Return	CH-DD	Remaining bookings (price, amounts carried over, cards, etc.)
D	Creditor Postal Address RltdPties ++Cdtr +++Pty (only V2019) ++++PstlAdr	No	Yes	N/A	N/A	N/A	Payment recipient's address; if available. If possible, the data are delivered in structured form, otherwise unstructured.	N/A	N/A	N/A
D	Creditor Scheme ID RltdPties ++Cdtr +++Pty (only V2019) ++++ld ++++Orgld ++++Othr <ld></ld>	No	Yes	N/A	N/A	N/A	N/A	N/A	Displays the contract number (RS-PID).	N/A
D	<b>Creditor Account</b> RltdPties ++CdtrAcct	No	Yes	IBAN or QR-IBAN redirected.	of the beneficiary, i	f payment is	Address of creditor if available. Data is supplied structured if ever possible, otherwise unstructured.	N/A	N/A	N/A
					/s supplies a value; r nd remaining booki	egardless of the "batc ngs).	h booking/single bool	king" booking logic a	nd with or without a	reference (does not
D	Ultimate Creditor RltdPties ++UltmtCdtr +++Pty (only V2019) ++++Nm	No	Yes	Name of the end	beneficiary; if availa	ble.	Account number (IBAN or proprie- tary account format) of creditor if available.	Name of ultimate creditor if available. Supplied only in case of a multilevel payment procedure (e.g., business customer [creditor] with several divisions [ultimate creditor]).	N/A	N/A

Level	ISO field	Notification in case of camt.053 having no detailed notification	Notification in case of camt.053 having detailed notification	IBAN	IBAN with Creditor Reference	QR bill virtual account	OSR	Return	CH-DD	Remaining bookings (price, amounts carried over, cards, etc.)
D	Ultimate Creditor RltdPties ++UltmtCdtr +++Pty (only V2019) ++++PstlAdr	No	Yes	Address of the end	d beneficiary; if avail	able.	N/A	Name of ultimate creditor if available.	N/A	N/A
D	Ultimate Creditor RltdPties ++UltmtCdtr +++Pty (only V2019) ++++ld	No	Yes	End beneficiary's a	account number, if av	vailable.	N/A	Account number (IBAN or proprie- tary account format) of ultimate creditor if available.	N/A	N/A
D	<b>Debtor Agent</b> RltdAgts +DbtrAgt ++FinInstnId +++BICFI	No	Yes	Identification (BIC)	) of third-party debt	or bank.	N/A	Identification (BIC) of third-party debtor bank.	N/A	N/A
D	Debtor Agent RltdAgts +DbtrAgt ++FinInstnId +++CIrSysMmbId ++++MmbId	No	Yes	Identification (BC	number) of third-pa	arty debtor bank.	N/A	ldentification (BC number) of third-party debtor bank.	N/A	N/A
D	<b>Debtor Agent</b> RltdAgts +DbtrAgt ++FinInstnId +++Nm	No	Yes	Name of debtor b	bank.		N/A	Name of debtor bank.	N/A	N/A
D	<b>Debtor Agent</b> RltdAgts +DbtrAgt ++FinInstnId +++PstIAdr	No	Yes	Address of debtor	r bank.		N/A	Address of debtor bank.	N/A	N/A
D	<b>Purpose Code</b> Purp +Cd	No	Yes	Payment reference	e of the original ord	er	N/A	N/A	Purpose of payment of original order (pain.008)	N/A

Level	ISO field	Notification in case of camt.053 having no detailed notification	Notification in case of camt.053 having detailed notification	IBAN	IBAN with Creditor Reference	QR bill virtual account	OSR	Return	CH-DD	Remaining bookings (price, amounts carried over, cards, etc.)
D	<b>Remittance Information</b> Rmtlnf +Ustrd	No	Yes	Messages according to customer order	N/A	N/A	N/A	Messages as per cu	stomer order.	N/A
D	Creditor Remittance Information Rmtlnf +Strd ++CdtrReflnf +++Tp	No	Yes	N/A	SCOR value in field <cd></cd>	Value QRR- reference in field <prtry>.</prtry>	N/A	N/A	N/A	N/A
D	Creditor Remittance Information Rmtlnf +Strd ++CdtrRefInf +++Ref	No	Yes	N/A	Creditor Reference	QR-reference number	OSR reference number	N/A	N/A	
D	Additional Remittance Information Rmtlnf +Strd ++AddtlRmtlnf	No	Yes	Additional informa Reject code. Possik ?REJECT?0 = no re ?REJECT?1 = rejec Error code. Potent ?ERROR?000 = KE	eject t ial values:	ode.	Reject code. Possible values: ?REJECT?0 = no reject ?REJECT?1 = reject ?REJECT?5 = mass reject	N/A	N/A	N/A
D	<b>RitdDts</b> +AccptncDtTm	No	Yes		Here, the job date	e is supplied.				N/A
D	<b>RtrInf</b> +Rsn	No	Yes		N/A	N/A	N/A	Can be used with the code NARR	Reason for the return. PostFinance used the following codes: FF05, MD01, MS03, RC01, SL01	N/A
D	<b>RtrInf</b> +AddtlInf	No	Yes		Indication of reas	on for R-transaction.				N/A

### 3.12 camt.054 detailed notification

### 3.12.1 camt.054 from pain.001

It is possible to choose the type of debit note in the pain.001 message: the different combinations have a direct influence on the camt.054 structure:

Payment information	on from pain.001	camt.054				
Batch Booking Debtor Account/ Type/Proprietary		Information at entry level (C level)	Information at transaction details level (D level)			
Confirmation of exe	ecution					
True/false	CND <sup>1</sup>	1 C level with information on collective order	1 D level with information on collective order			
Single conformatio	n					
True/false CWD <sup>2</sup>		1 C level	1-n D level			
True/false	SIA <sup>3</sup>	with information on collective order	with Information about individual transactions			

<sup>1</sup> CND: Collective advice no details

<sup>2</sup> CWD: Collective advice with details

<sup>3</sup> SIA: Single advice

Level	ISO field	Single confirmation (CWD/SIA) ISO 20022 V4	Confirmation of execution (CND) ISO 20022 V4		
А	Message Identification <msgld></msgld>	Clear message identification. Always supplied b	by PostFinance.		
A	Creation Date Time <credttm></credttm>	Creation date and time of message. Always sup	Creation date and time of message. Always supplied by PostFinance.		
А	<b>Page Number</b> <pgnb></pgnb>	Supplied with value «1».			
A	Last Page Indicator <lastpgind></lastpgind>	Supplied with value «True».			
A	Additional Information <addtlinf></addtlinf>	Indicates the type of notification. Possible value "SPS/1.7/PROD" for a productive message "SPS/1.7/TEST" for a test message "SPS/1.7/Reconstruction" for a repeat order ISO V2019: "SPS/2/PROD" for a productive message "SPS/2/TEST" for a test message "SPS/2/Reconstruction" for a repeat order	:S:		
В	Identification <ld></ld>	Clear identification. Always supplied by PostFin	ance.		
В	Creation Date Time <credttm></credttm>	Creation date and time of message. Always sup	oplied by PostFinance.		
В	CopyDuplicateIndicator <cpydplctind></cpydplctind>	If camt.054 has already been sent to the custor	ner, value DUPL is supplied in this field.		
В	IBAN <iban></iban>	PostFinance always supplies the IBAN of the un	derlying message; no proprietary account formats.		

Level	ISO field	Single confirmation (CWD/SIA) ISO 20022 V4	Confirmation of execution (CND) ISO 20022 V4		
В	Acct +Tp ++Cd	ISO V2019: Codes account category: SVGS (Savings account) TRAN (Current account and payment transacti	ion account)		
В	Acct +Ccy	ISO V2019: specification of the currency in wh	ich the account in managed.		
В	Acct +Nm	ISO V2019: Account designation: Private Account Private Saving Account Business Account Business Bank Account Operation Account Loro Account			
В	Acct +Ownr ++Nm	Account description of the corresponding acco	ount. Always supplied by PostFinance.		
С	Amount <amt></amt>	Amount of bulk booking in the account currer	ncy.		
С	<b>Currency</b> <ccy></ccy>	During the booking The currency in field «Currency» at C level is ic Note: The currency is always included as an att E.g.: <amt ccy="«CHF»">1000</amt>			
С	<b>Debit Credit Indicator</b> <cdtdbtind></cdtdbtind>	Always supplied with value «DBIT».			
С	<b>Reversal Indicator</b> <rvslind></rvslind>	Not applicable. Not supplied.			
С	Entry +Sts ++Cd	Status of booking. PostFinance always supplies ISO V2013: BOOK value is delivered in the <st ISO V2019: BOOK value is delivered in the <co< td=""><td>s&gt; element</td></co<></st 	s> element		
С	<b>Booking Date</b> +BookgDt ++Dt	Date of booking. Always supplied by PostFinar	nce.		
С	<b>Value Date</b> +ValDt ++Dt	Value date of booking. Always supplied by Pos	stFinance.		
С	Account Servicer Reference AcctSvcrRef	Not applicable. Not supplied.			
С	Bank Transaction Code +BkTxCd ++Domn +++Cd ++Fmly +++Cd +++SubFmlyCd	This element gives information on the type of Normal execution: PMNT ICDT AUTT Express execution: PMNT ICDT PRCT	booking.		
С	<b>Chrgs</b> +TtlChrgsAndTaxAmt	month.	ys debited to the charges account at the end of the ovided (sum of all single records under «Entry» or		
С	<b>Chrgs</b> +TtlChrgsAndTaxAmtCcy	Currency of total charges for this booking whi end of the month.	ich are always debited to the charges account at th		

Level	ISO field	Single confirmation (CWD/SIA) ISO 20022 V4	Confirmation of execution (CND) ISO 20022 V4
С	<b>Charges Record Type</b> +Chrgs ++Rcrd +++Tp ++++Prtry	Categorisation of charges for the collective order 20 = Price of express execution	:
С	<b>Charges by Record Type</b> +Chrgs ++Rcrd +++Amt	Total charges for the corresponding category at b	booking level.
С	<b>Charges by Record Type</b> +Chrgs ++Rcrd +++Amt Ccy	Currency of total charges for the corresponding of	category at booking level.
С	<b>Charges</b> +Chrgs ++Rcrd +++CdtDbtInd	Supplied with value «DBIT».	
С	<b>Charges</b> +Chrgs ++Rcrd +++ChrgInclInd	Indicator whether the charges are deducted from at the end of month). Here, PostFinance always s value «False».	
С	<b>NtryDtls</b> +Batch ++NbOfTxs	Not applicable. Not supplied.	
С	<b>NtryDtls</b> +AddtlNtryInf	Not applicable. Not supplied.	
D	<b>Message ID</b> Refs ++Msgld	«Message identification» (A level) from the origin	nal order message (pain.001).
D	Account Servicer Reference Refs ++AcctSvcrRef	Not applicable. Not supplied.	
D	Payment Information Identification Refs ++PmtInfld	«Payment identification» (B level) from the origin	al order message (pain.001).
D	Instruction Identification Refs ++InstrID	«Instruction identification» (C level) from the original order message (pain.001).	Not applicable. Not supplied.
D	End To End Identification Refs ++EndToEndId	«End-to-end identification» (C level) from the original order message (pain.001).	Not applicable. Not supplied.
D	<b>Type</b> Refs +Prtry ++Tp	Not applicable. Not supplied.	
D	Propriety Reference Refs +Prtry ++Ref	Not applicable. Not supplied.	

Level	ISO field	Single confirmation (CWD/SIA) ISO 20022 V4	Confirmation of execution (CND) ISO 20022 V4
D	<b>Amount</b> Amt	Amount of transaction. The amount in field «Amount» at D level is displayed in the account currency.	Amount corresponds to the amount at C level and corresponds to the account currency.
D	Currency	Currency of booking. The currency in field «Currency» at C level is ider Note: The currency is always included as an attrib E.g.: <amt ccy="«CHF»">1000</amt>	
D	Credit Debit Indicator CdtDbtInd	Always supplied with value «DBIT».	
D	Instructed Amount AmtDtls ++InstdAmt +++Amt	Corresponds to the job amount in the job currency.	Not applicable. Not supplied.
D	<b>Transaction Amount</b> AmtDtls ++TxAmt +++Amt	Corresponds tot he transaction amount in the the transaction currency.	Not applicable. Not supplied.
D	Source Currency AmtDtls ++TxAmt +++CcyXchg ++++SrcCcy	Not applicable. Not supplied.	
D	<b>Target Currency</b> AmtDtls ++TxAmt +++CcyXchg ++++TrgtCcy	Not applicable. Not supplied.	
D	<b>Exchange Rate</b> AmtDtls ++TxAmt +++CcyXchg ++++XchgRate	Not applicable. Not supplied.	
D	Counter Value Amount AmtDtls ++CntrValAmt +++Amt	Corresponds to the amount in the account currency.	Not applicable. Not supplied.
	<b>Counter Value Amount</b> AmtDtls ++CntrValAmt +++Amt +++CcyXchg ++++SrcCcy	Job amount and currency. Only supplied if the job currency is not identical with the account currency.	Not applicable. Not supplied.
	<b>Counter Value Amount</b> AmtDtls ++CntrValAmt +++Amt +++CcyXchg ++++XchgRate	Exchange rate between job currency and account currency. Only supplied if the job currency is not identical with the account currency.	Not applicable. Not supplied.

Level	ISO field	Single confirmation (CWD/SIA) ISO 20022 V4	Confirmation of execution (CND) ISO 20022 V4
D	Bank Transaction Code +BkTxCd ++Domn +++Cd ++Fmly +++Cd +++SubFmlyCd	This element gives information on the type of booking. Payment type 1: PMNT ICDT AUTT Payment type 3 (national payment by PostFinance): PMNT ICDT BOOK Payment type 3 (national payment by bank): PMNT ICDT DMCT Payment type 5 (SEPA giro international): PMNT ICDT ESCT Payment type 6 (giro International & urgent): PMNT ICDT XBCT Payment type 8 (cash International): PMNT ICHQ XBCT	Corresponds to the BTC code at C level.
D	<b>Chrgs</b> +TtlChrgsAndTaxAmt	Total charges for this transaction which are always debited to the charges account at the end of the month.	N/A
D	<b>Chrgs</b> +TtlChrgsAndTaxAmtCcy	Currency of total charges for this transaction which are always debited to the charges account at the end of the month.	Not applicable. Not supplied.
D	<b>Chrgs</b> +Rcrd ++Tp +++Prtry	<ul> <li>Categorisation of charges:</li> <li>30 = Price for international payment reduced transfer amount</li> <li>31 = Price for international payment SEPA transfer</li> <li>32 = Price for international payment speed surcharge</li> <li>33 = Price for international payment full transfer amount</li> <li>34 = Price for international payment surcharge no IBAN indication</li> <li>35 = Price of cash international</li> </ul>	Not applicable. Not supplied.
D	<b>Chrgs</b> +Rcrd ++Amt	Total charges for the corresponding category at transaction level.	Not applicable. Not supplied.
D	<b>Chrgs</b> +Rcrd ++Amt Ccy	Currency of total charges for the corresponding category at transaction level.	Not applicable. Not supplied.
D	<b>Chrgs</b> +Rcrd ++CdtDbtInd	Supplied with value «DBIT».	Not applicable. Not supplied.
D	<b>Chrgs</b> +Rcrd ++ChrgInclInd	Indicator whether the charges are deducted from the transaction amount or not (e.g., debiting at the end of month). Here, PostFinance always supplies a reference to the charges and therefore value «False».	Not applicable. Not supplied.
D	<b>Debtor Name</b> RltdPties ++Dbtr +++Pty (only V2019) ++++Nm	Not applicable. Not supplied.	
D	<b>Debtor Postal Address</b> RltdPties ++Dbtr +++Pty (only V2019) ++++PstlAdr	Not applicable. Not supplied.	

Level	ISO field	Single confirmation (CWD/SIA) ISO 20022 V4	Confirmation of execution (CND) ISO 20022 V4
D	<b>Debtor Account</b> RltdPties ++DbtrAcct	Account number of debtor in IBAN format.	Not applicable. Not supplied.
D	Ultimate Debtor RltdPties ++UltmtDbtr +++Pty (only V2019) ++++Nm	Name of original debtor if available. Only supplied if a multilevel payment procedure is involved (e.g., business customer [debtor] with several divisions [ultimate debtor]).	Not applicable. Not supplied.
D	Ultimate Debtor RltdPties ++UltmtDbtr +++Pty (only V2019) ++++PstlAdr	Address of original debtor if available. Only supplied if a multilevel payment procedure is involved (e.g., business customer [debtor] with several divisions [ultimate debtor]). Data is supplied structured if ever possible, otherwise unstructured.	Not applicable. Not supplied.
D	<b>Creditor Name</b> RltdPties ++Cdtr +++Pty (only V2019) ++++Nm	Name of creditor.	Not applicable. Not supplied.
D	<b>Creditor Postal Address</b> RltdPties ++Cdtr +++Pty (only V2019) ++++PstlAdr	Address of creditor. Data is supplied structured if ever possible, otherwise unstructured.	Not applicable. Not supplied.
D	<b>Creditor Account</b> RltdPties ++CdtrAcct	Account number (IBAN or proprietary account format) of creditor.	Not applicable. Not supplied.
D	Ultimate Creditor RltdPties ++UltmtCdtr +++Pty (only V2019) ++++Nm	Name of ultimate creditor if available. Only supplied if a multilevel payment procedure is involved (e.g., business customer [creditor] with several divisions [ultimate creditor]).	Not applicable. Not supplied.
D	Ultimate Creditor RltdPties ++UltmtCdtr +++Pty (only V2019) ++++PstlAdr	Address of ultimate creditor if available. Only supplied if a multilevel payment procedure is involved (e.g., business customer [creditor] with several divisions [ultimate creditor]). Data is supplied structured if ever possible, otherwise unstructured.	Not applicable. Not supplied.
D	Creditor Agent RltdAgts +CdtrAgt ++FinInstnId +++BICFI	Identification (BIC) of third-party creditor bank.	Not applicable. Not supplied.
D	Creditor Agent RltdAgts +CdtrAgt ++FinInstnld +++ClrSysMmbld ++++Mmbld	Identification (BC number) of third-party creditor bank.	Not applicable. Not supplied.
D	<b>Creditor Agent</b> RltdAgts +CdtrAgt ++FinInstnld +++Nm	Name of creditor bank.	Not applicable. Not supplied.

Level	ISO field	Single confirmation (CWD/SIA) ISO 20022 V4	Confirmation of execution (CND) ISO 20022 V4
D	<b>Creditor Agent</b> RltdAgts +CdtrAgt ++FinInstnId +++PstIAdr	Name of creditor bank.	Not applicable. Not supplied.
D	<b>Purpose Code</b> Purp +Cd	Purpose of payment of original order (pain.001).	
D	<b>Remittance Information</b> Rmtlnf +Ustrd	Messages as per customer order.	Not applicable. Not supplied.
D	Creditor Remittance Information RmtInf +Strd ++CdtrRefInf +++Tp	Depending on payment type. Possible values: N/A QR Reference occurs in Element Prtry SCOR occurs in Element Cd.	Not applicable. Not supplied.
D	Creditor Remittance Information RmtInf +Strd ++CdtrRefInf +++Ref	Depending on payment type. Possible values: N/A QR Reference occurs in Element Prtry SCOR occurs in Element Cd.	Not applicable. Not supplied.
D	Additional Remittance Information Rmtlnf +Strd ++AddtlRmtlnf	additional unstructured messages	Not applicable. Not supplied.
D	<b>Related Price</b> RltdPric +Prtry ++Tp	Not applicable. Not supplied.	
D	<b>Related Price</b> RltdPric +Prtry ++Pric	Not applicable. Not supplied.	
D	<b>RitdDts</b> +AccptncDtTm	Not applicable. Not supplied.	
D	<b>Rtrinf</b> +Rsn	Not applicable. Not supplied.	
D	<b>Rtrinf</b> +Addtlinf	Not applicable. Not supplied.	

## 3.12.2 camt.054 Details

Level	ISO field	IBAN	IBAN with Creditor Reference	QR bill virtual account	OSR	Return	CH-DD			
А	Message Identification <msgld></msgld>	Clear message identificatio	n. Always supplied by PostFina	ance.						
A	Creation Date Time <credttm></credttm>	Creation date and time of	message. Always supplied by F	PostFinance.						
А	<b>BICFI</b> <anybic></anybic>	Only supplied if sent to cha	annel SWIFT FileAct.							
А	<b>Page Number</b> <pgnb></pgnb>	Example 1: camt message	054 messages. Always supplied not split = value 1 & last page split: File 1 = value 1 & last pag	page indicator value TRU	E File 2 = value 2 & last pag	ge indicator value TRUE				
А	Last Page Indicator <lastpgind></lastpgind>		element indicates whether this is the last camt message. If a file has to be split over several messages due to technical size limitation, this element is FALSE in the first sages and TRUE in the last message.							
A	Additional Information <addtlinf></addtlinf>	"SPS/1.7/PROD" for a proc "SPS/1.7/TEST" for a test r "SPS/1.7/Reconstruction" f "SPS/1/7/Storno" for a car ISO V2019: "SPS/2/PROD" for a produ "SPS/2/TEST" for a test me "SPS/2/Reconstruction" for	Indicates the type of notification. Possible values: "SPS/1.7/PROD" for a productive message "SPS/1.7/Reconstruction" for a repeat order "SPS/1.7/Storno" for a cancellation file ISO V2019: "SPS/2/PROD" for a productive message "SPS/2/TEST" for a test message "SPS/2/Reconstruction" for a repeat order "SPS/2/Reconstruction" for a repeat order							
В	Identification <id></id>	Clear identification. Alway: Elements GroupHeader/Me		ment/Identification are no	t identical. A and B level	must be unique separately from	each other.			
В	Creation Date Time <credttm></credttm>	Creation date and time of	message. Always supplied by F	PostFinance.						
В	From To Date <frtodt></frtodt>	Supplies the start date and	the end date of the camt mes	sage. Always supplied by	PostFinance.					
В	<b>CopyDuplicateIndicator</b> <cpydplctind></cpydplctind>	This field is supplied with v	This field is supplied with value DUPL only in case of reconstruction.							
В	IBAN <iban></iban>	PostFinance always supplie	s the IBAN of the underlying n	nessage; no proprietary a	count formats.					

Level	ISO field	IBAN	IBAN with Creditor Reference	QR bill virtual account	OSR	Return	CH-DD		
В	Acct +Tp ++Cd	SVGS (Savings account)	ISO V2019: Codes account category: SVGS (Savings account) TRAN (Current account and payment transaction account)						
В	Acct +Ccy	ISO V2019: specification of	ISO V2019: specification of the currency in which the account in managed.						
В	Acct +Nm	ISO V2019: Account design Private Account Private Saving Account Business Account Business Bank Account Operation Account Loro Account	Private Saving Account Business Account Business Bank Account Operation Account						
В	Acct +Ownr ++Nm	Account description of the	Account description of the corresponding account. Always supplied by PostFinance.						
С	Entry Reference	N/A	In the case of batch entries, the IBAN will be inserted.	In the case of batch entries, the QR-IBAN will be inserted.	The subscriber number is shown in proprietary format (e.g.: XXXXXXXX).	N/A	The contract number (RS-PID) is shown		
		PostFinance always supplies bookings).	a value; regardless of the "bat	ch booking/single booking" b	ooking logic and with or withc	out a reference (does not apply	to returns and remaining		
С	Amount <amt></amt>	Amount of booking. The amount in field Amoun	t at C level is displayed in the a	iccount currency.					
С	<b>Currency</b> <ccy></ccy>	Currency of booking. The currency in field Curren Note: The currency is alway	cy at C level is identical with th s included as an attribute of ele	e account currency. ement Amount. E.g.: <amt cc<="" td=""><td>y=CHF&gt;1000</td></amt>	y=CHF>1000				
С	<b>Debit Credit Indicator</b> <cdtdbtind></cdtdbtind>	Indicator of a debit or credi Credit = CRDT Debit = DBIT	t booking						
С	<b>Reversal Indicator</b> <rvslind></rvslind>	Normal processing / correction booking = FalseTrueNormal entry = FalseReversal bookings = TrueReturn and refund = True							
С	<b>Entry</b> +Sts ++Cd	ISO V2013: BOOK value is o	nce always supplies value BOOI lelivered in the <sts> element lelivered in the <cd> subeleme</cd></sts>						

Level	ISO field	IBAN	IBAN with Creditor Reference	QR bill virtual account	OSR	Return	CH-DD
С	<b>Booking Date</b> BookgDt+Dt	Date of booking. Always su	pplied by PostFinance.				
С	<b>Value Date</b> ValDt+Dt	Value date of booking. Alw	ays supplied by PostFinance.				
С	Account Servicer Reference AcctSvcrRef	Clear booking reference as	signed by the financial instituti	ion.			
C	Bank Transaction Code +BkTxCd ++Domn +++Cd ++Fmly +++Cd +++SubFmlyCd	This element gives informat	ion on the type of booking.				
С	<b>Chrgs</b> +TtlChrgsAndTaxAmt	Total charges for this booki the end of the month.	ng which are always debited to	N/A	Total charges for this booking which are always debited to the charges account at the end of the month.		
С	<b>Chrgs</b> +TtlChrgsAndTaxAmtCcy	Currency of total charges for this booking which are always debited to the charges account at the end of the month.				N/A	Currency of total charges for this booking which are always debited to the charges account at the end of the month.
С	Charge Record Type Chrgs +Rcrd ++Tp +++Prtry	Categorisation of charges: 1 = Reject 2 = inpayments at post cou 4 = Post-processing 5 = Full recording	nter		Categorisation of charges: 1 = Reject 6 = outpayments at post counter	N/A	Categorisation of charges: 9 = charge for CH-DD refund
С	Charges by Record Type Chrgs +Rcrd ++Amt	Total charges for the corres	ponding category at booking l	level.		N/A	Total charges for the corres- ponding category at booking level.
C	Charges by Record Type Chrgs +Rcrd ++Amt Ccy	Currency of total charges for	or the corresponding category	at booking level.		N/A	Currency of total charges for the corresponding category at booking level.

Level	ISO field	IBAN	IBAN with Creditor Reference	QR bill virtual account	OSR	Return	CH-DD		
С	<b>Chrgs</b> +Rcrd ++CdtDbtInd	Indicator whether the ch	narge is a positive (DBIT = regula	r charge) or a negative (CRDT =	refund) amount.	N/A	Indicator whether the charge is a positive (DBIT = regular charge) or a negative (CRDT = refund) amount.		
С	<b>Chrgs</b> +Rcrd ++ChrgInclInd		harges are deducted from the bo s supplies a reference to the cha	iting at the end of the month).	N/A	Indicator whether the charges are deducted from the booking amount or not (e.g., debiting at the end of the month). Here, PostFinance always supplies a reference to the charges and therefore value False.			
С	<b>NtryDtls</b> +Batch ++NbOfTxs	Number of transactions	(D level) of the corresponding bo	ooking (C level).					
С	<b>NtryDtls</b> +AddtlNtryInf	Here, PostFinance alway	s supplies the booking text.						
D	<b>Message ID</b> Refs ++Msgld		A level) from the original order n ly if there is a corresponding ord		N/A	Message identification (A le message (e.g., from pain.00 if there is a corresponding o	1). This value is supplied only		
D	Account Servicer Reference Refs ++AcctSvcrRef	Unique transaction ID as	isigned by PostFinance. The ID is	a mandatory requirement for e	nquiries, except for return.				
D	Payment Information Identification Refs ++PmtInfld		entification (B level) from the orig upplied only if there is a corresp		N/A	nal order message	(e.g., from pain.001). This value is supplied only if there is		
D	Instruction Identifica- tion Refs ++InstrID		(C level) from the original order ly if there is a corresponding ord		N/A		level) from the original order 1). This value is supplied only rder.		
D	<b>End To End</b> <b>Identification</b> Refs ++EndToEndId		n (C level) from the original orde upplied only if there is a corresp		N/A		level) from the original order 1). This value is supplied only rder.		

Level	ISO field	IBAN	IBAN with Creditor Reference	QR bill virtual account	OSR	Return	CH-DD
D	Unique End To End Transaction Reference Refs ++UETR		ique end-to-end transaction reference. Always assigned by PostFinance; even if a TR is delivered in pain.001. UETR from interbank payment transactions are taken 1:1			Unique end-to-end transaction reference. Always assigned by PostFinance; even if a UETR is delivered in pain.001. UETR from interbank payment transactions are taken 1:1.	N/A
D	<b>Type</b> Refs +Prtry ++Tp	Value for QR payments: 00			Values for OSR: 06 = OSR counter 46 = OSR+ counter	N/A	N/A
D	<b>Propriety Reference</b> Refs +Prtry ++Ref	Unique number of paper-b	ased payments.			N/A	N/A
D	<b>Amount</b> Amt	Transaction amount The amount of the field "Amount" at D level is provided in the account currency. Identical to Amount field at C level for single entries.			Transaction amount The amount of the field "Amount" at D level is provided in the account currency.		
D	Currency		ncy at C level is identical with the sincluded as an attribute of eleven	ne account currency. ement Amount. E.g.: <amt cc<="" td=""><td>y=CHF&gt;1000</td></amt>	y=CHF>1000		
D	Credit Debit Indicator CdtDbtInd	Indicator of a debit or a cre Credit = CRDT Debit = DBIT	dit booking				
D	<b>Transaction Amount</b> AmtDtls ++TxAmt +++Amt	Corresponds to the transac	tion amount in transaction curi	rency.	N/A	Corresponds to the transac- tion amount in transaction currency.	N/A
D	<b>Source Currency</b> AmtDtls ++TxAmt +++CcyXchg ++++SrcCcy	Corresponds to the transac	tion currency.		N/A	Corresponds to the transac- tion currency.	N/A

Level	ISO field	IBAN	IBAN with Creditor Reference	QR bill virtual account	OSR	Return	CH-DD
D	<b>Target Currency</b> AmtDtls ++TxAmt +++CcyXchg ++++TrgtCcy	Corresponds to the accoun	t currency.		N/A	Corresponds to the account currency.	N/A
D	Exchange Rate AmtDtls ++TxAmt +++CcyXchg ++++XchgRate	Exchange rate used betwee	en transaction and account cur	rency.	N/A	Exchange rate used between transaction and account currency.	N/A
D	Bank Transaction Code +BkTxCd ++Domn +++Cd ++Fmly +++Cd +++SubFmlyCd	Normal transaction: QRR Swiss Post branch: PM PO-SO: PMNT RCDT DMCT Paperless: PMNT RCDT AU' SIC: PMNT RCDT ATXN Reversal transaction: QRR Swiss Post branch: PM PO-SO: PMNT RCDT CAJT Paperless: PMNT RCDT CAJT Correction transaction: QRR Swiss Post branch: PM PO-SO: PMNT RCDT DMCT Paperless: PMNT RCDT AU' SIC: PMNT RCDT ATXN	IT INT CNTR CAJT IT INT CNTR CDPT		Normal transaction: OSR Swiss Post branch: PMNT CNTR CWDL PO-SO: PMNT ICDT DMCT Reversal transaction: OSR Swiss Post branch: PMNT CNTR DAJT PO-SO: PMNT ICDT DAJT Correction transaction: OSR Swiss Post branch: PMNT CNTR CWDL PO-SO: PMNT ICDT DMCT	Normal transaction: PMNT ICDT RRTN	Normal transaction: CH-DD Cor1 credit: PMNT IDDT PMDD CH-DD B2B credit: PMNT IDDT PMDD R-transaction: CH-DD Cor1 debit objection: PMNT IDDT PRDD Reversal transaction: CH-DD Cor1 full debit reversal: PMNT IDDT PRDD CH-DD B2B full debit reversal: PMNT IDDT PRDD
D	<b>Chrgs</b> +TtlChrgsAndTaxAmt	Total charges for this transa	Total charges for this transaction which are always debited to the charges account at the end of the month.				Total charges for this transaction which are always debited to the charges account at the end of the month.
D	<b>Chrgs</b> +TtlChrgsAndTaxAmtCcy	Currency of total charges for month.	or this transaction which are al	ways debited to the charges a	ccount at the end of the	N/A	Currency of total charges for this transaction which are always debited to the charges account at the end of the month.

Level	ISO field	IBAN	IBAN with Creditor Reference	QR bill virtual account	OSR	Return	CH-DD
D	<b>Chrgs</b> +Rcrd ++Tp +++Prtry	Categorisation of charges: 1 = reject 2 = inpayments at post cou 4 = Post-processing 5 = Full recording	nter		Categorisation of charges: 1 = reject 6 = outpayments at post counter	N/A	Categorisation of charges: 9 = charge for CH-DD refund
D	<b>Chrgs</b> +Rcrd ++Amt	Total charges for the corres	oonding category at transactic	on level		N/A	Total charges for the corres- ponding category at transaction level
D	<b>Chrgs</b> +Rcrd ++Amt Ccy	Currency of total charges fo	or the corresponding category	at transaction level.		N/A	Total charges for the corres- ponding category at transaction level.
D	<b>Chrgs</b> +Rcrd ++CdtDbtInd	Indicator whether the charg	je is a positive (DBIT = regular	N/A	Indicator whether the charge is a positive (DBIT = regular charge) or negative (CRDT = refund) amount.		
D	<b>Chrgs</b> +Rcrd ++ChrgInclInd		Indicator whether the charges are deducted from the transaction amount or not (e.g., debiting at the end of the month). Here, PostFinance always supplies a reference to the charges and therefore value False.				Indicator whether the charges are deducted from the transaction amount or not (e.g., debiting at the end of the month). Here, PostFinance always supplies a reference to the charges and therefore value False.
D	<b>Debtor Name</b> RltdPties ++Dbtr +++Pty (only V2019) ++++Nm	Name of debtor if available.			N/A	Name of debtor if available.	Name of debtor.
D	Debtor Postal Address RltdPties ++Dbtr +++Pty (only V2019) ++++PstlAdr	Payer's address; if available. otherwise unstructured.	If possible, the data are delive	red in structured form,	N/A	Payer's address; if available. I delivered in structured form,	
D	<b>Debtor Account</b> RltdPties ++DbtrAcct	Payer's account number; if a	vailable.		N/A	Account number (IBAN or proprietary account format) of debtor if available.	Account number (IBAN) of debtor.

Level	ISO field	IBAN	IBAN with Creditor Reference	QR bill virtual account	OSR	Return	CH-DD
D	Ultimate Debtor RltdPties ++UltmtDbtr +++Pty (nur V2019) ++++Nm	Original payer's name; if ava	ilable.		N/A	Name of original debtor if av	railable.
D	Ultimate Debtor RltdPties ++UltmtDbtr +++Pty (only V2019) ++++PstlAdr	Original payer's address; if available.			N/A	Address of original debtor if available.	
D	Creditor Name RltdPties ++Cdtr +++Pty (nur V2019) ++++Nm	N/A	N/A	N/A	Name of creditor if available.	N/A	N/A
D	Creditor Postal Address RltdPties ++Cdtr +++Pty (only V2019) ++++PstlAdr	N/A	N/A	N/A	Address of creditor if available. Data is supplied structured if ever possible, otherwise unstructured.	N/A	N/A
D	Creditor Scheme ID RltdPties ++Cdtr +++Pty (nur V2019) ++++ld ++++Orgld +++++Othr <ld></ld>	N/A	N/A	N/A	N/A	N/A	Displays the contract number (RS-PID).
D	<b>Creditor Account</b> RltdPties ++CdtrAcct	IBAN or QR-IBAN of the ber	eficiary, if payment is redirecte	d.	Account number (IBAN or proprietary account format) of creditor if available.	N/A	
		PostFinance always supplies bookings).	a value; regardless of the "bat	ch booking/single booking" bo	ooking logic and with or witho	ut a reference (does not apply	to returns and remaining
D	Ultimate Creditor RltdPties ++UltmtCdtr +++Pty (nur V2019) ++++Nm	End beneficiary's name; if available			N/A	Name of ultimate creditor if available.	N/A

Level	ISO field	IBAN	IBAN with Creditor Reference	QR bill virtual account	OSR	Return	CH-DD
D	Ultimate Creditor RltdPties ++UltmtCdtr +++Pty (only V2019) ++++PstlAdr	End beneficiary's address; i	available.		N/A	Address of ultimate creditor if available.	N/A
D	Ultimate Creditor RltdPties ++UltmtCdtr +++Pty (nur V2019) ++++Id	End beneficiary's account n	umber; if available.		N/A	Account number (IBAN or proprietary account format) of ultimate creditor if available.	N/A
D	<b>Debtor Agent</b> RltdAgts +DbtrAgt ++FinInstnld +++BICFI	Identification (BIC) of third-	entification (BIC) of third-party debtor bank.			Identification (BIC) of third-party debtor bank.	N/A
D	Debtor Agent RltdAgts +DbtrAgt ++FinInstnld +++ClrSysMmbld ++++Mmbld	Identification (BC number) of third-party debtor bank.			N/A	Identification (BC number) of third-party debtor bank.	N/A
D	<b>Debtor Agent</b> RltdAgts +DbtrAgt ++FinInstnld +++Nm	Name of debtor bank.			N/A	Name of debtor bank.	N/A
D	<b>Debtor Agent</b> RltdAgts +DbtrAgt ++FinInstnld +++PstlAdr	Address of debtor bank.			N/A	Address of debtor bank.	N/A
D	<b>Purpose Code</b> Purp +Cd	Payment reference of the c	riginal order		N/A	N/A	Purpose of payment of original order (pain.008).
D	Remittance Information RmtInf +Ustrd	Messages according to customer order.	N/A	N/A	N/A	Messages as per customer of	rder.

Level	ISO field	IBAN	IBAN with Creditor Reference	QR bill virtual account	OSR	Return	CH-DD
D	Creditor Remittance Information Rmtlnf +Strd ++CdtrReflnf +++Tp	N/A	Value SCOR in field <cd></cd>	Value QRR in field <prtry>.</prtry>	N/A		
D	Creditor Remittance Information Rmtlnf +Strd ++CdtrReflnf +++Ref	N/A	Creditor Reference	QR-reference number.	OSR reference number.	N/A	
D	Additional Remittance Information RmtInf +Strd ++AddtIRmtInf		?REJECT?1 = reject Error code. Possible values:			N/A	
D	<b>RltdDts</b> +AccptncDtTm	The date of posting is delive	ered here.				
D	<b>Rtrinf</b> +Rsn	N/A	N/A	N/A	N/A	Can be used with the code NARR	Reason for the return. PostFinance uses the following codes: FF05, MD01, MS03, RC01, SL01
D	<b>RtrInf</b> +AddtlInf	Reason for an R-transaction					

# 3.12.3 camt.054 booking

I

Level	ISO field	O field camt.054 credit camt.054 debit			
A	Message Identification <msgld></msgld>	Clear message identification. Always supplied by PostFinance.			
A	Creation Date Time <credttm></credttm>	Creation date and time of message. Always supplied by PostFinance.			
A	BICFI <anybic></anybic>	Only supplied if sent to channel SWIF	Γ FileAct.		
A	<b>Page Number</b> <pgnb></pgnb>	Used to number camt.054 messages. Always supplied by PostFinance. Example 1: camt message not split – value 1 & last page indicator value TRUE Example 2: camt message split: File 1 = value 1 & last page indicator value FALSE. File 2 = value 2 & last page indicator value TRUE.			
A	Last Page Indicator <lastpgind></lastpgind>	This element indicates whether this is the last camt message. If a file has to be split over several messages due to technical size limitations, this element is FALSE in the first messages and TRUE in the last message.			
A	Additional Information <addtlinf></addtlinf>	Indicates the type of notification. Possible values: "SPS/1.7/PROD" for a productive message ISO V2019: "SPS/2/PROD" for a productive message			
В	<b>Identification</b> <ld></ld>	Clear identification. Always supplied by PostFinance. Elements GroupHeader/Message Identification and Statement/Identification are not identical. A and B level attribute forms must be unique separately from each other.			
В	Electronic Sequence Number <elctrncseqnb></elctrncseqnb>	This value is always delivered by PostFinance and represents the year's current statement number based on the Swiss Post working day.			
В	Creation Date Time <credttm></credttm>	Creation date and time of message. Always supplied by PostFinance.			
В	From To Date <frtodt></frtodt>	Supplies the start date and the end date of the camt message. Always supplied by PostFinance.			
В	IBAN <iban></iban>	PostFinance always supplies the IBAN of the underlying message; no proprietary account formats			
В	Acct +Tp ++Cd	ISO V2019: Codes account category: SVGS (Savings account) TRAN (Current account and payment transaction account)			
В	Acct +Ccy	ISO V2019: specification of the currency in which the account in managed.			
В	Acct +Nm	ISO V2019: Account designation: Private Account Private Saving Account Business Account Business Bank Account Operation Account Loro Account			
В	Acct +Ownr ++Nm	Account description of the corresponding account. Always supplied by PostFinance.			
С	AmountAmount of booking. <amt>The amount in field Amount at C level is shown in the account currency.</amt>				

Level	ISO field	camt.054 credit	camt.054 debit	
С	<b>Currency</b> <ccy></ccy>	Amount of booking. The currency in field Currency at C level is identic Note: The currency is always included as an attrik E.g.: <amt ccy="CHF">1000</amt>		
С	<b>Debit Credit Indicator</b> <cdtdbtind></cdtdbtind>	Indicator of a debit or credit booking. Fixed value CRDT.	Indicator of a debit or credit booking. Fixed value DBIT.	
С	<b>Reversal Indicator</b> <rvslind></rvslind>	Normal booking = False. Reversal booking = True.		
С	<b>Entry</b> +Status ++Code	Status of booking. PostFinance always supplies value BOOK. ISO V2013: BOOK value is delivered in the <sts> element ISO V2019: BOOK value is delivered in the <cd> subelement</cd></sts>		
С	<b>Booking Date</b> BookgDt+Dt	Date of booking. Always supplied by PostFinance	<u>.</u>	
С	<b>Value Date</b> ValDt+Dt	Value date of booking. Always supplied by PostF	iinance.	
С	Account Servicer Reference AcctSvcrRef	Clear booking reference assigned by the financia	l institution.	
С	Bank Transaction Code +BkTxCd ++Domn +++Cd ++Fmly +++Cd +++SubFmlyCd	This element gives information on the type of bo	oking.	
С	<b>NtryDtls</b> +AddtlNtryInf	Here, PostFinance always supplies the booking te	ext.	
	<b>Message ID</b> Refs ++Msgld	Message identification (A level) from the original is supplied only if there is a corresponding order.	order message (e.g., from pain.001). This value	
D	Account Servicer Reference Refs ++AcctSvcrRef	Clear transaction ID assigned by PostFinance.		
D	Payment Information Identification Refs ++PmtInfld	Payment information identification (B level) from the original order message (e.g., from pain.001). This value is supplied only if there is a corresponding order.		
D	Instruction Identification Refs ++InstrID	Instruction identification (C level) from the original order message (e.g., from pain.001). This value is supplied only if there is a corresponding order.		
D	<b>End To End Identification</b> Refs ++EndToEndId	End-to-end identification (C level) from the original order message (e.g., from pain.001). This value is supplied only if there is a corresponding order. There is no value for OSR.		
D	Unique End To End Transaction Reference Refs ++UETR	Unique end-to-end transaction reference. Always assigned by PostFinance; even if a UETR is delivered in pain.001. UETR from interbank payment transactions are taken 1:1.		
D	Amount Amt	Amount of booking, corresponds to the amount at C level.		
D	Currency	Currency of booking, corresponds to the currency at C level.		

Level	ISO field	camt.054 credit	camt.054 debit	
D	Credit Debit Indicator CdtDbtInd	Fixed value CRDT	Fixed value DBIT	
		The remaining D level attributes are not supplied.		

# 4 SWIFT MT-Files

### 4.1 Supported SWIFT standard

PostFinance supports the current SWIFT version as amended of the released Service Description and Standard Requirements for MT Messages. The SWIFT requirements can be downloaded from **swift.com**. There are mandatory and optional fields in the Standard Requirements for MT Messages, **swift.com**. Optional fields (tags) can be used differently by the respective financial institutions.

The following tables show how some of these fields are used and handled by PostFinance. They also include specifications for certain key fields to ensure smooth processing of MT messages.

### 4.2 Character set

The character set as per the Standard Requirements for MT Messages is used.

### 4.3 MT940 customer statement message

Status <sup>1</sup>	Field	Field Name	<b>Content/Options</b>	Notes
Μ	20	Transaction Reference Number	16x	Clearly identifiable consecutive number.
0	21	Related Reference	16x	Not used by PostFinance Ltd.
Μ	25	Account Identification	35x	The IBAN number is always sent.
М	28C	Statement Number/ Sequence Number	5n[/5n]	Value >1 is used in the sequence number only if the account statement is spread over several messages.
Μ	60a	Opening Balance	F or M	Option M is used only if the account statement is spread over several messages. F for the first message, M for subsequent messages.
0	61	Statement Line	6!n[4!n]2a[1!a]15d1! a3!c16x[//16x][34x]	Subfield 1: Value date Subfield 2: Booking date Subfield 6: Code FMSC is supplied. The booking code – if requested – can be found in field 86. Subfield 7: Reference for recipient up to 16 characters (depending on job entry). Subfield 8: Booking ID Subfield 9: Image ID
0	86	Information to Account Owner	6*65x	Booking text for account owner. If there is a booking code, the field starts as follows: Code?61. The booking code always has four digits.
Μ	62a	Closing Balance (Booked Funds)	F or M	Option M is used only if the account statement is spread over several messages. F for the last message, M for preceding messages.
0	64	Closing Available Balance (Available Funds)	1!a6!n3!a15d	ls always delivered.
0	65	Forward Available Balance	1!a6!n3!a15d	

# 4.4 MT942 Statement Message

Status <sup>1</sup>	Field	Field Name	Content/Options	Notes
Μ	20	Transaction Reference Number	16x	Clearly identifiable consecutive number.
0	21	Related Reference	16x	Not used by PostFinance Ltd.
М	25	Account Identification	35x	The IBAN number is always sent.
М	28C	Statement Number / Sequence Number	5n[/5n]	Value >1 is used in the sequence number only if the account statement is spread over several messages.
М	34F	Floor Limit Indicator	3!a[1!a]15d	Not used by PostFinance Ltd or always used with value 0.
0	34F	Floor Limit Indicator	3!a[1!a]15d	Not used by PostFinance Ltd or always used with value 0.
М	13D	Date/Time Indication	6!n4!n1!x4!n	Date and time of message creation.
0	61	Statement Line	6!n[4!n]2a[1!a]15d1! a3!c16x[//16x][34x]	Subfield 1: Value date Subfield 2: Booking date Subfield 6: Code FMSC is supplied. The booking code – if requested – can be found in field 86. Subfield 7: Reference for recipient up to 16 characters (depending on job entry) Subfield 8: Booking ID Subfield 9: Image ID
0	86	Information to Account Owner	6*65x	Booking text for account owner. If there is a booking code, the code starts as follows: Code?61. The booking code always has four digits.
0	90D	Number and Sum of Entries	5n3!a15d	Number and sum of debits. This field is supplied only if there are debits in the message.
0	90C	Number and Sum of Entries	5n3!a15d	Number and sum of credits. This field is supplied only if there are credits in the message.

# 4.5 MT950 stement message (for banks)

Status <sup>1</sup>	Field	Field Name	Content/Options	Notes
Μ	20	Transaction Reference Number	16x	Clearly identifiable consecutive number.
М	25	Account Identification	35x	The IBAN number is always sent.
Μ	28C	Statement Number/ Sequence Number	5n[/5n]	Value >1 is used in the sequence number only if the account statement is spread over several messages.
Μ	60a	Opening Balance	F or M	Option M is used only if the account statement is spread over several messages. F for the first message, M for subsequent messages.
0	61	Statement Line	6!n[4!n]2a[1!a]15d1! a3!c16x[//16x][34x]	Subfield 1: Value date Subfield 2: Booking date Subfield 6: Code FMSC is supplied. The booking code – if requested – can be found in field 86. Subfield 8: Booking ID
Μ	62a	Closing Balance (Booked Funds)	F or M	Option M is used only if the account statement is spread over several messages. F for the last message, M for preceding messages.
0	64	Closing Available Balance (Available Funds)	1!a6!n3!a15d	

 $^{1}M = Mandatory, O = Optional$ 

# 4.6 MT900 statement message (debits for banks)

Status <sup>1</sup>	Field	Field Name	<b>Content/Options</b>	Notes
М	20	Transaction Reference Number	16x	Clearly identifiable consecutive number.
М	21	Related Reference	16x	Reference from the original SWIFT booking.
М	25	Account Identification	35x	The IBAN number is always sent.
Μ	32A	Value Date, Currency Code, Amount	6!n3!a15d	
0	52a	Ordering Institution	A or D	
0	72	Sender to Receiver Information	6*35x	

# 4.7 MT910 statement message (credits for banks)

Status <sup>1</sup>	Field	Field Name	Content/Options	Notes
Μ	20	Transaction Reference Number	16x	Clearly identifiable consecutive number.
Μ	21	Related Reference	16x	Reference from the original SWIFT booking.
Μ	25	Account Identification	35x	The IBAN number is always sent.
М	32A	Value Date, Currency Code, Amount	6!n3!a15d	
0	50a	Ordering Customer	A, F or K	
0	52a	Ordering Institution	A or D	
0	56a	Intermediary	A or D	
0	72	Sender to Receiver Information	6*35x	